

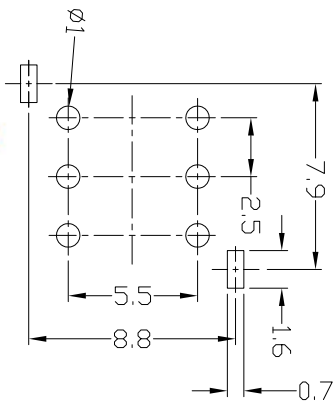


DIMENSIONS

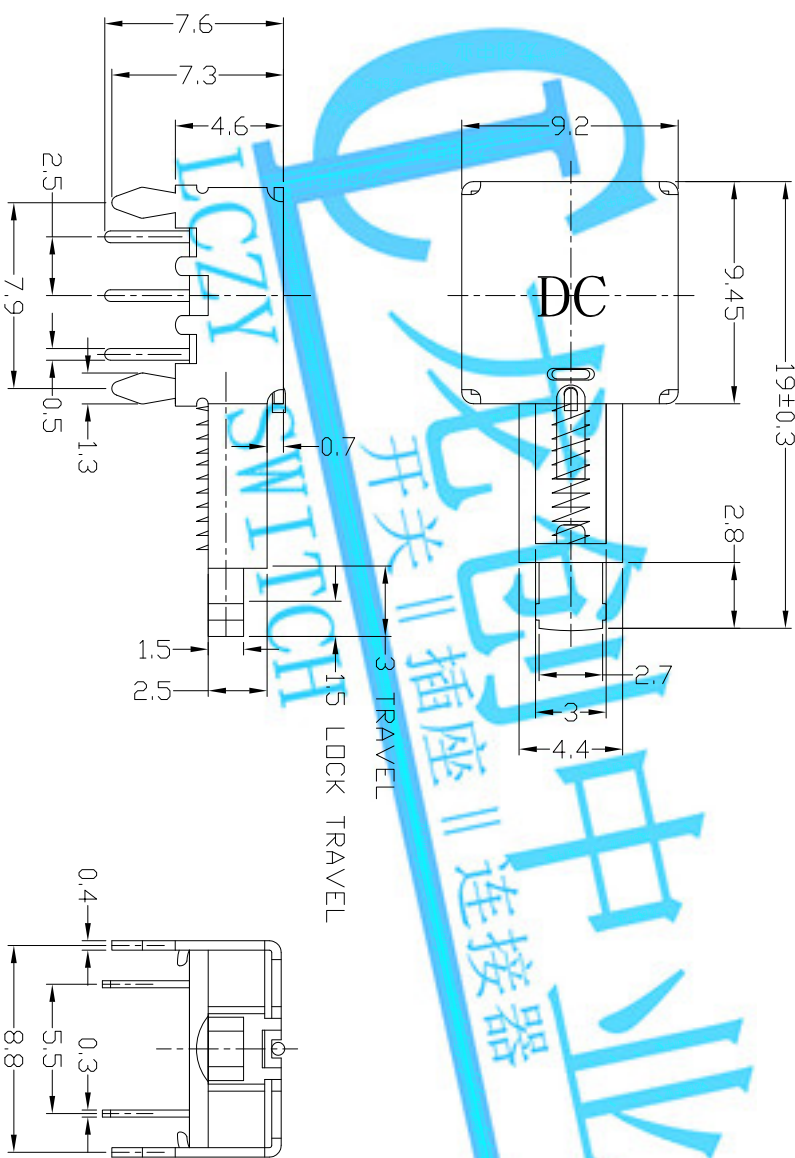

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50 V 0.3A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-22E02L
	NON-LOCK	AP-22E03N
STROKE	FULL 3.0mm	LOCK 1.5mm
OPERATING FORCE	250±100gf	
OPERATING LIFE(cycles)	10,000	

8	CLIP	PBS	2	Ag PLATED	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING PLATE	PBS	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	CAM STICK	PBS WIRE	1	NATURAL							
5	SPRING	SUS WIRE	1	NATURAL							
4	TERMINAL	BRASS	6	Ag PLATED		FINISH	SEE NOTE				
3	TERMINAL CASE	PHENOLIC RESIN	1	NATURAL				DR: <i>Jacky</i> 2017/05/12	DWG NO.: AZJ-22E0203	AP-22E02L & AP-22E03N	
2	COVER	MILD STEEL	1	NI PLATED				CHKD: <i>Jacky</i> 2017/05/12	SCALE		
1	KNDB	PDM/PBT	1	YELLOW		Q'TY		APPD:	3-1		
ND.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.					REV.	CUSTOMER DRAWING