
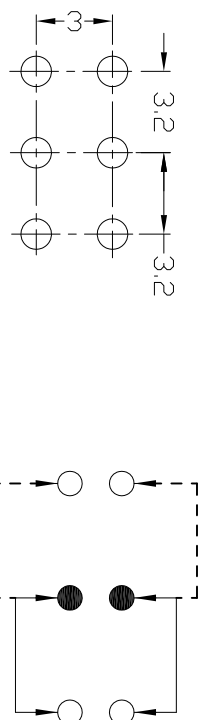


DIMENSIONS

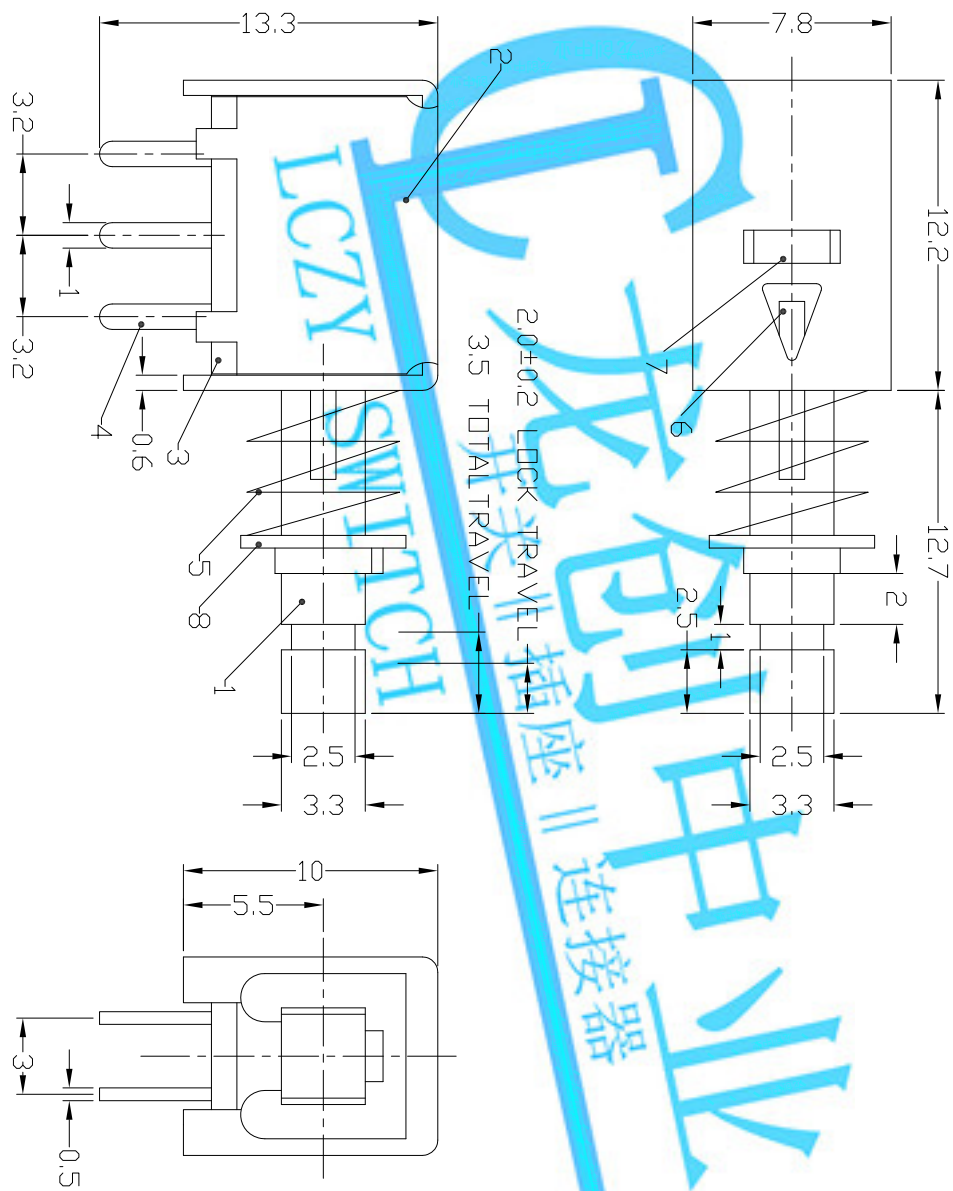

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC	
CIRCUIT	2P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	
STROKE	FULL 3.5mm	LOCK 2.0mm
OPERATING FORCE	250±100gf	
OPERATING LIFE(cycles)	10,000	

9	CLIP	PBS	2	Ag PLATED	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
8	BLOCK	MILD STEEL	1	Ni PLATED	OVER 1.5mm: ±0.2mm	MAT'L					
7	SPRING PLATE	PBS	1	NATURAL		SEE NOTE					
6	CAM STICK	BRASS	1	Ni PLATED		SEE NOTE					
5	SPRING	SUS	1	Ni PLATED				TITLE: PUSH SWITCH / HORIZONTAL			
4	TERMINAL	BRASS	6	Ag PLATED		FINISH					
3	TERMINAL CASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE					
2	COVER	MILD STEEL	1	Ni PLATED		Q'TY					
1	KNDB	PBT	1	BLACK		DR: Ricky 2017/05/12		DWG NO.: AZJ-22F11		SCALE	SHEET
ND.	PARTS	MATERIAL	Q'TY	FINISHING		CHKD: Ricky 2017/05/12		3.1	1/1	A	REV.
						APPD:					CUSTOMER DRAWING