
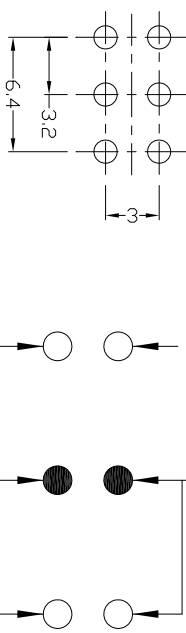


DIMENSIONS

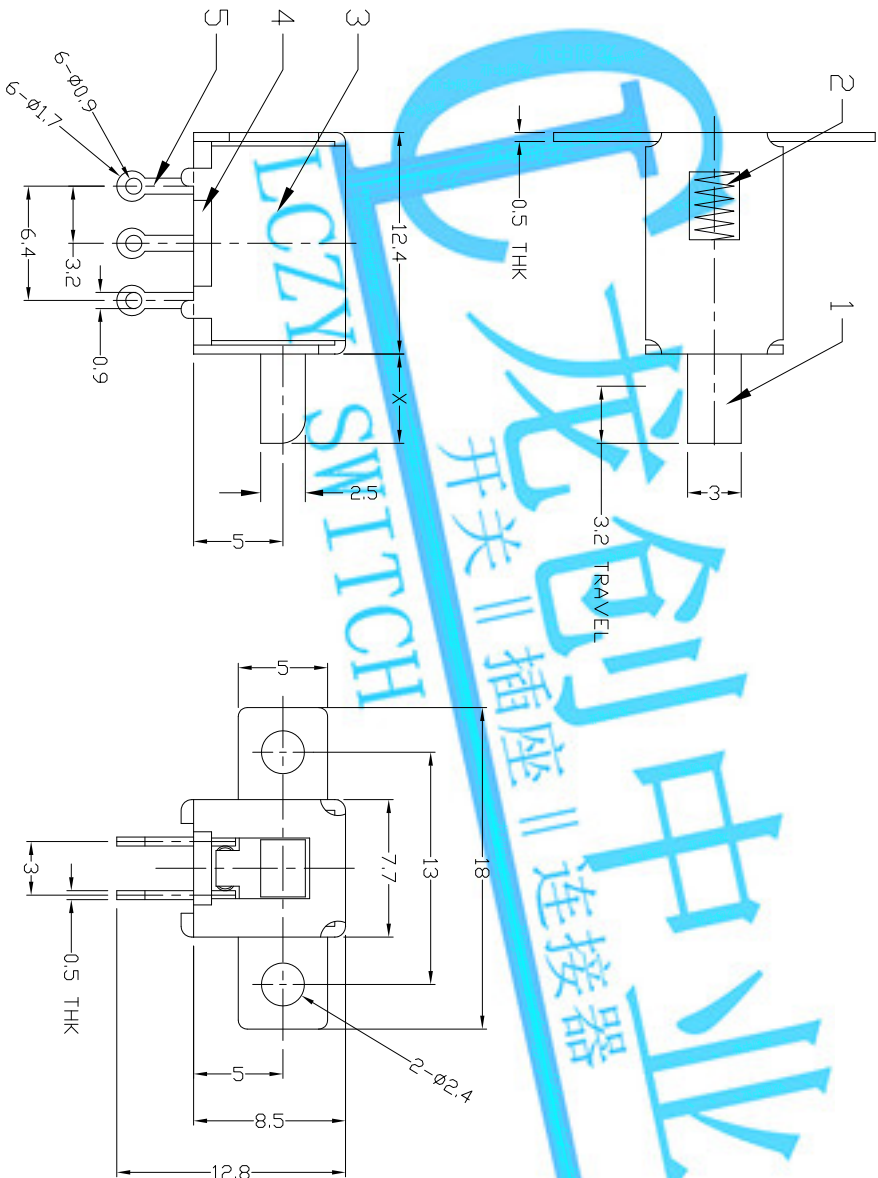

P.C.B LAYOUT

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 3.2mm
OPERATING FORCE	100±30gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:				PART NO:					
PUSH SWITCH / HORIZONTAL				AP-22F14N					
DR: <i>Jacky</i> 2015/03/31				DWG NO: ADL-22F14					
CHKD: <i>Jacky</i> 2015/03/31				SCALE SHEET REV.					
APPD:				2:1		1/1		A	
				CUSTOMER DRAWING					
WITHIN 1.5mm±0.1mm									
OVER 1.5mm±0.2mm									
UNITS mm									
MATERIAL									
SEE NOTE									
FINISH									
SEE NOTE									
Q'TY									
									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.									
Q'TY				FINISHING					
MATERIAL				BLACK					
1				1					
PDM				NATURAL					
STEEL WIRE				Ni PLATED					
1				1					
FRAME				STEEL STRIP					
3				1					
BASE				PHENOLIC RESIN					
6				6					
TERMINAL				BRASS STRIP					
2				2					
CONTACT CLIP				PBS STRIP					
7									
8									
ND. PARTS									