


DIMENSIONS

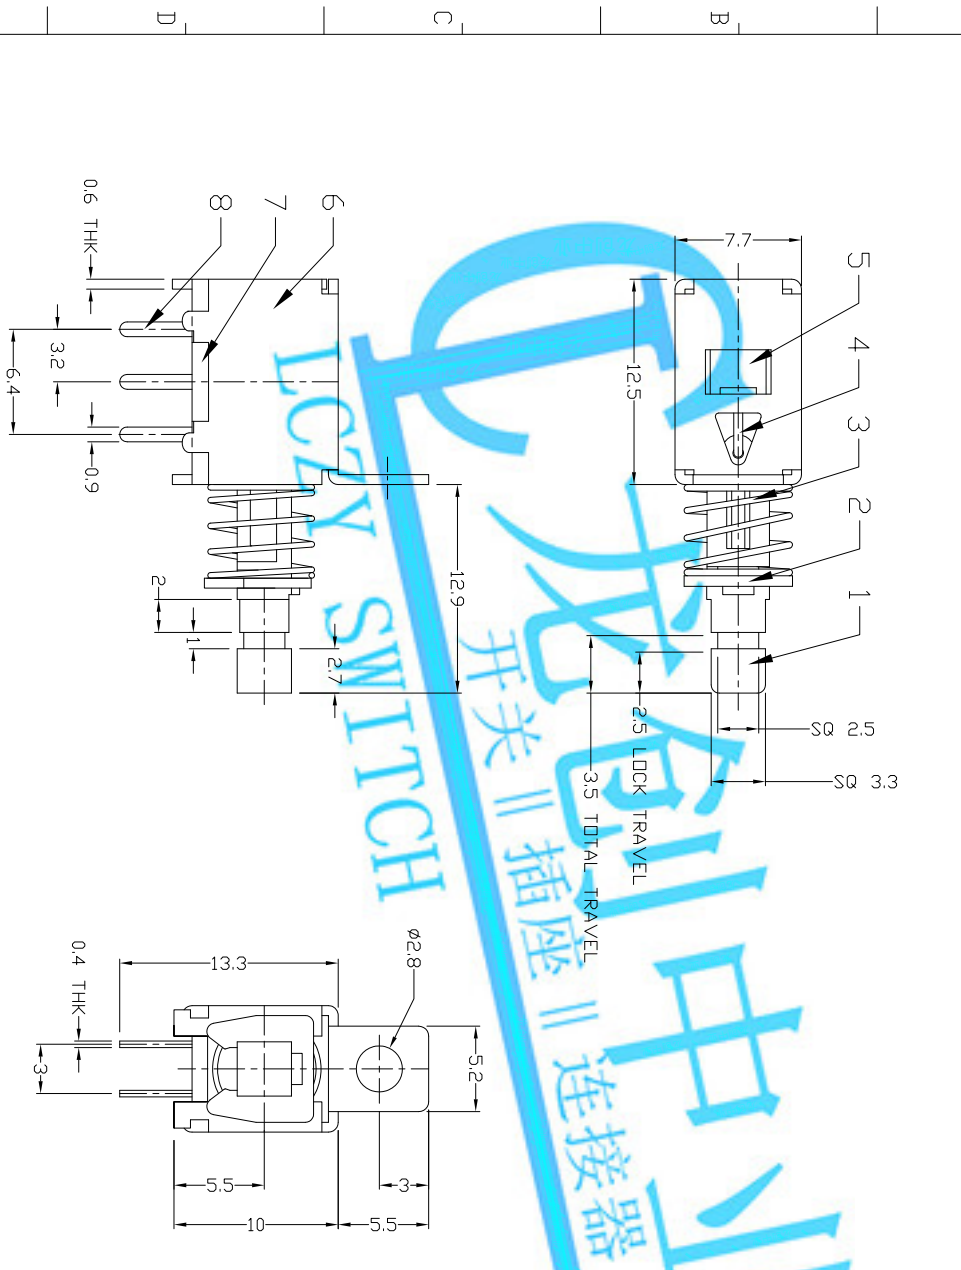

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	
STROKE	TOTAL 3.5mm	LOCK 2.5mm
OPERATING FORCE	250±100gf	
OPERATING LIFE(cycles)	10,000	

9	CONTACT CLIP	PBS STRIP	2	AG PLATED	WITHIN 1.5mm;±0.1mm OVER 1.5mm;±0.2mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
8	TERMINAL	BRASS STRIP	6	AG PLATED		MAT'L	SEE NOTE				
7	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE					
6	FRAME	STEEL STRIP	1	Ni PLATED		FINISH	SEE NOTE				
5	SPRING PLATE	PBS STRIP	1	NATURAL		TITLE:	PUSH SWITCH / HORIZONTAL	PART NO.:	AP-22F28L		
4	CAM STICK	PBS WIRE	1	NATURAL		DR:	Rocky 2015/04/01	DWG NO.:	ADL-22F28		
3	SPRING	STEEL WIRE	1	Ni PLATED		CHKD:	Rocky 2015/04/01	SCALE	SHEET	REV.	
2	BLOCK	STEEL STRIP	1	Ni PLATED		Q'TY		21	1/1	A	
1	KNOB	PA66	1	BLACK		APPD:					
ND.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.						