
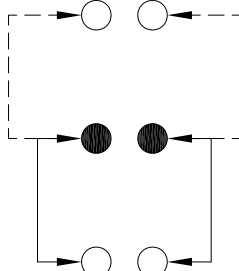



DIMENSIONS

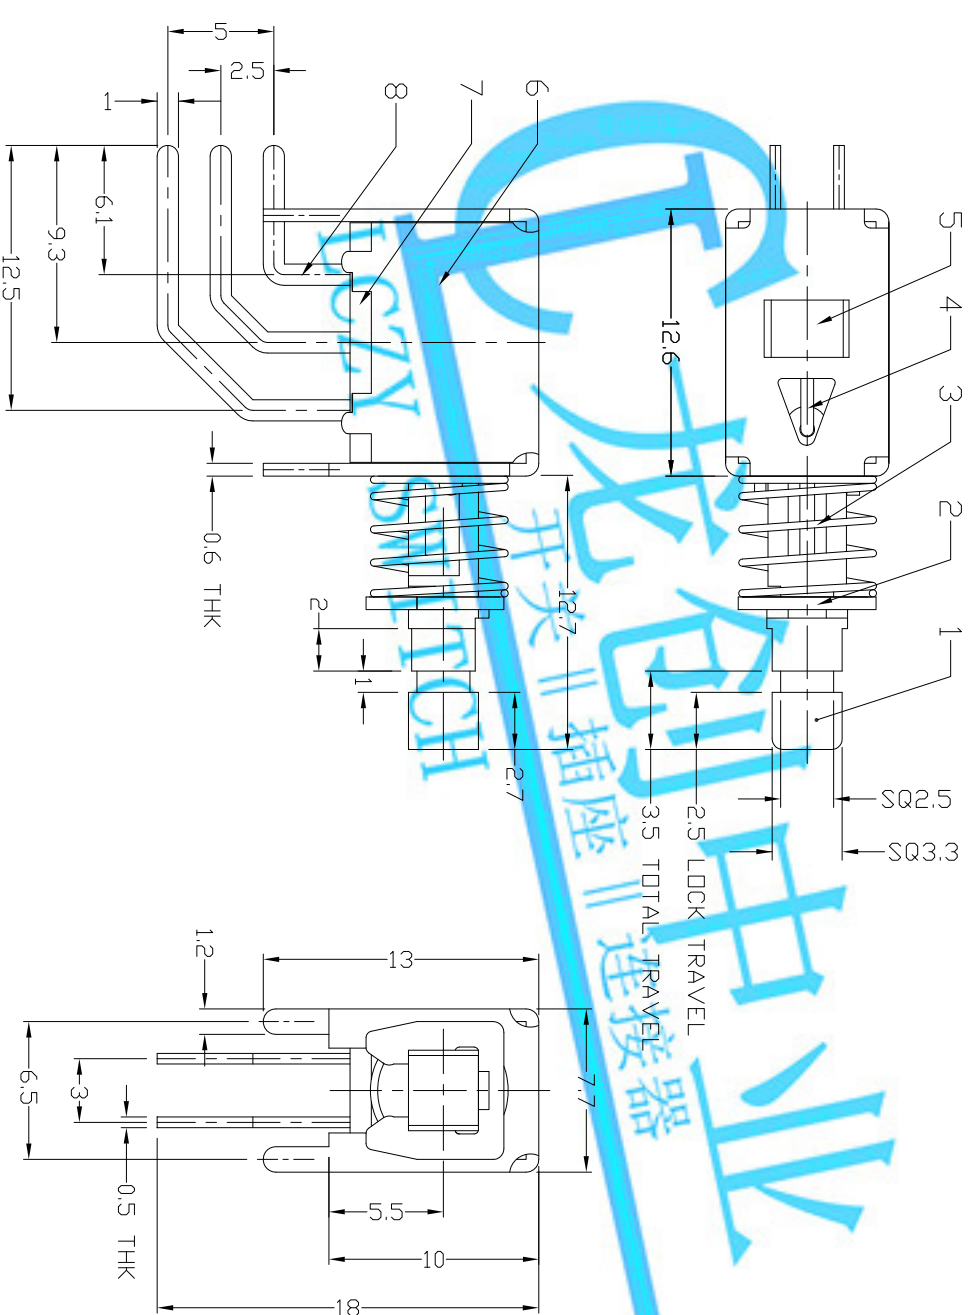

P.C.B LAYOUT
BOTTOM VIEW
CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	NON-SHORTING	
	SELF-LOCK	AP-22F33N
OPERATING MODE	NON-LOCK	AP-22F35L
STROKE	TOTAL 3.5mm	
	LOCK 2.5mm	
OPERATING FORCE	350±100gf	
OPERATING LIFE(cycles)	10,000	

9	CONTACT CLIP	PBS STRIP	2	Ag PLATED	WITHIN 1.5mm:±0.1mm OVER 1.5mm:±0.2mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
8	TERMINAL	BRASS STRIP	6	Ag PLATED		MAT'L	SEE NOTE							
7	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE	SEE NOTE							
6	FRAME	STEEL STRIP	1	Ni PLATED		FINISH	SEE NOTE							
5	SPRING PLATE	PBS STRIP	1	NATURAL		DR:	2015/04/01							
4	CAM STICK	PBS STRIP	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	CHKD:	2015/04/01	DWG NO:	AP-22F33N & AP-22F35L				
3	SPRING	STEEL WIRE	1	Ni PLATED		Q'TY	APPD:	2015/04/01			SCALE	SHEET	REV.	CUSTOMER
2	BLOCK	STEEL STRIP	1	BLACK		APPROV:	2015/04/01	5/2			1/1	A	DRAWING	
1	KNDB	PAG6	1	BLACK										
ND.	PARTS	MATERIAL	Q'TY	FINISHING										