




DIMENSIONS

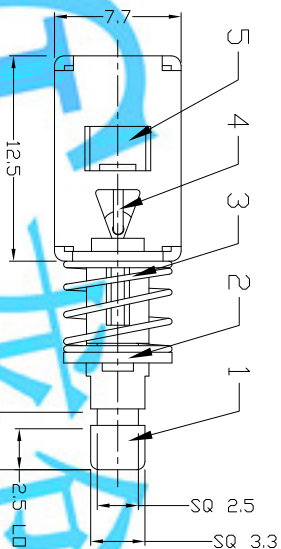

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	
STROKE	TOTAL 3.5mm	LOCK 2.5mm
OPERATING FORCE	250±100gf	
OPERATING LIFE(cycles)	10,000	

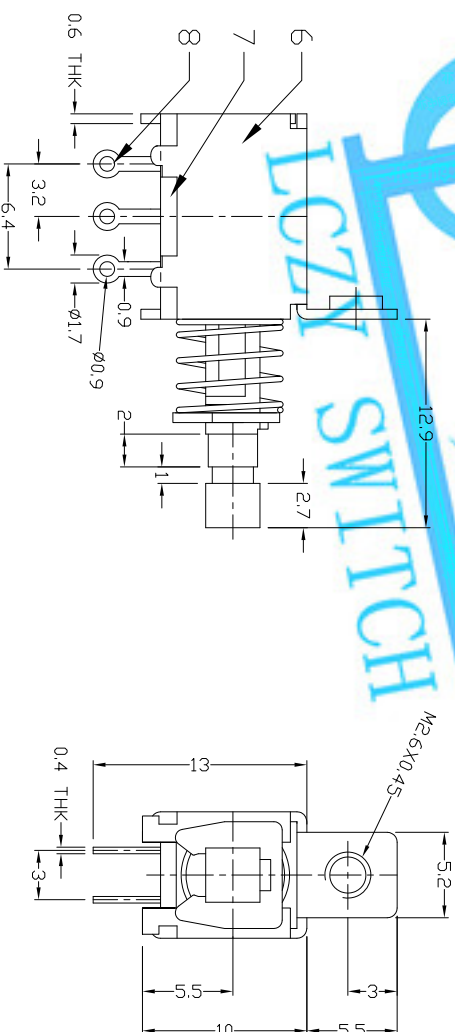

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:				PART NO:					
PUSH SWITCH / HORIZONTAL				AP-22F56L					
DR: <i>Jacky</i> 2016/12/24				DWG NO: ADL-22F56					
CHKD: <i>Jacky</i> 2016/12/24				SCALE SHEET REV. CUSTOMER					
APPD:				2:1 1/1 A DRAWING					
UNITS mm									
MAT'L									
SEE NOTE									
FINISH									
SEE NOTE									
WITHIN 1.5mm;±0.1mm									
OVER 1.5mm;±0.2mm									
9	CONTACT CLIP	PBS STRIP	2	AG PLATED					
8	TERMINAL	BRASS STRIP	6	AG PLATED					
7	BASE	PHENOLIC RESIN	1	NATURAL					
6	FRAME	STEEL STRIP	1	NI PLATED					
5	SPRING PLATE	PBS STRIP	1	NATURAL					
4	CAM STICK	PBS WIRE	1	NATURAL					
3	SPRING	STEEL WIRE	1	NI PLATED					
2	BLOCK	STEEL STRIP	1	NI PLATED					
1	KNOB	PA66	1	BLACK					
NO.	PARTS	MATERIAL	Q'TY	FINISHING					
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.				