
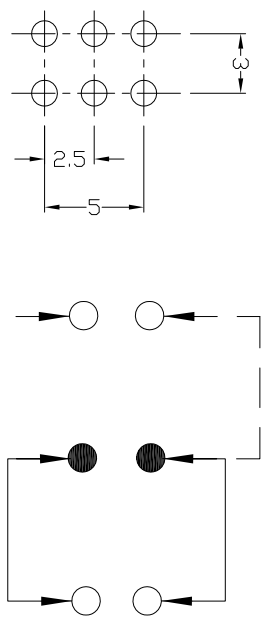


DIMENSIONS

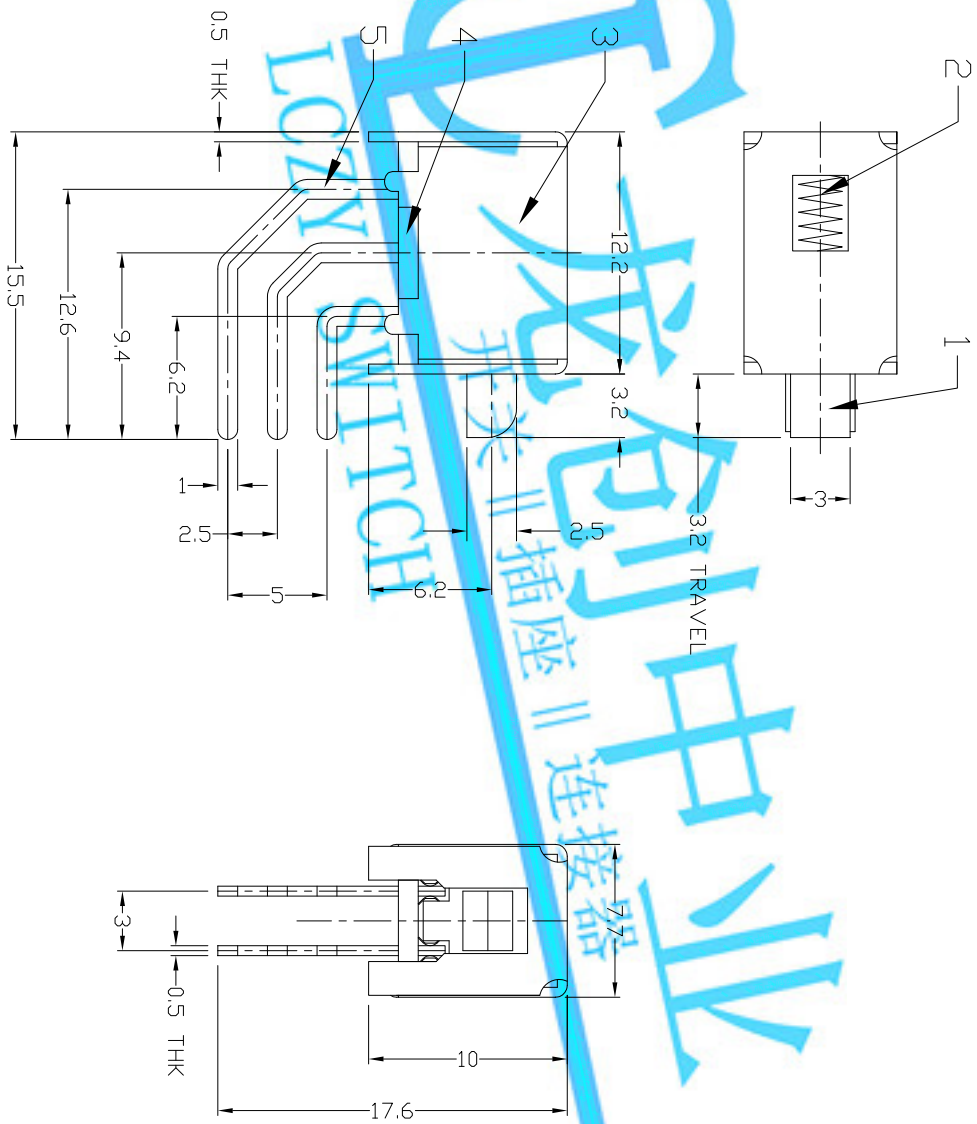

ELECTRD-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 3.2mm
OPERATING FORCE	70±20gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm±0.2mm	MAT'L	SEE NOTE				
6	CONTACT CLIP	PBS STRIP	2	Ag CLAD			SEE NOTE				
5	TERMINAL	BRASS STRIP	6	Ag PLATED			FINISH				
4	BASE	PHENOLIC RESIN	1	NATURAL			SEE NOTE				
3	FRAME	STEEL STRIP	1	Ni PLATED			DR: <i>Rocky</i> 2015/04/02	DWG NO.:	ADL-22F92	SCALE 1/1	
2	SPRING	STEEL WIRE	1	NATURAL			CHKD: <i>Rocky</i> 2015/04/02	SCALE	SHEET		
1	KNOB	POM	1	BLACK			APPD:	REV.	A		
ND.	PARTS	MATERIAL	Q'TY	FINISHING				CUSTOMER	DRAWING		