

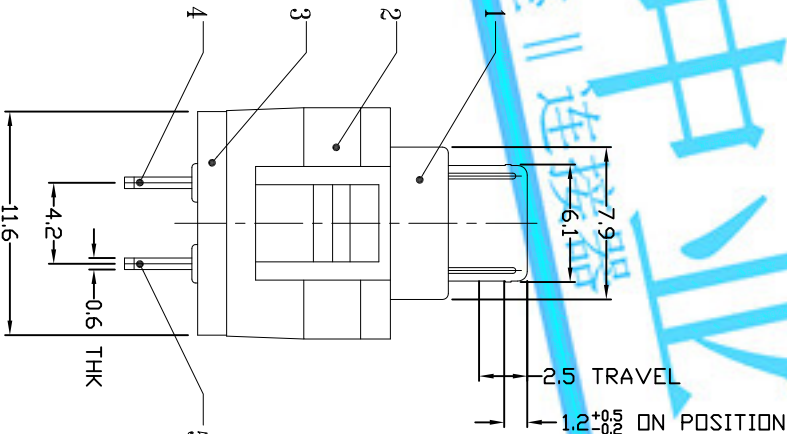


DIMENSIONS

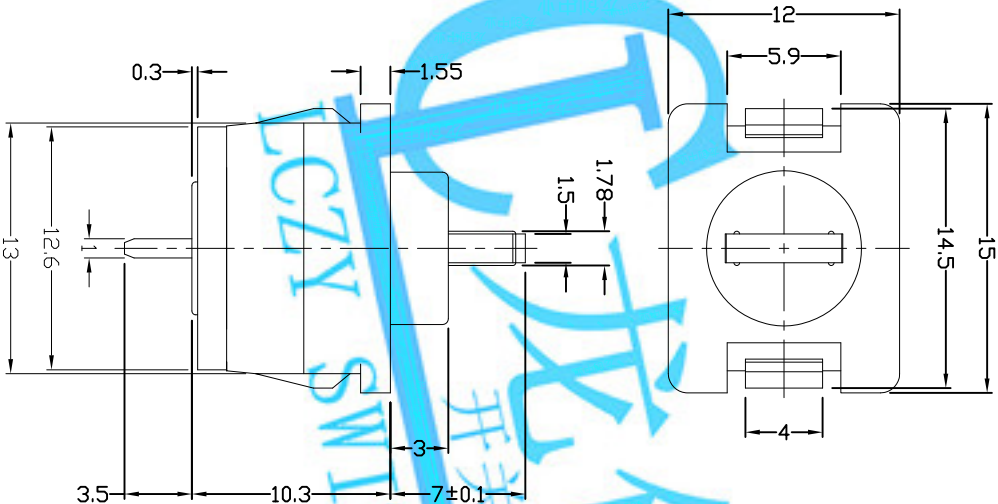

P.C.B LAYOUT
BOTTOM VIEW
CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC30V 0.1A	
CIRCUIT	1P1T	
CONTACT RESISTANCE	30mΩ MAX.	
TIMING		
OPERATING MODE	NON-LOCK	
STROKE	FULL 2.5mm	DN 1.2±0.2mm
OPERATING FORCE	100±30gF	
OPERATING LIFE(cycles)	10,000	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

		UNITS		
8			WITHIN 1.5mm: ±0.1mm	
7	SPRING	SUS	1	NATURAL
6	CONTACT	SUS	1	Ag(0.5μm) PLATED
5	U-TERMINAL	BRASS STRIP	1	Ag(0.5μm) PLATED OVER Ni PLATED
4	V-TERMINAL	BRASS STRIP	1	Ag(0.5μm) PLATED OVER Ni PLATED
3	CASE	NYLON+J.G	1	BLACK
2	COVER	PC	1	BLACK
1	KNDB	PDM	1	WHITE
ND.	PARTS	MATERIAL	Q'TY	FINISHING

OVER 1.5mm: ±0.2mm		MATERIAL	
		SEE NOTE	
		FINISH	
		SEE NOTE	
		Q'TY	

TITLE:		PART NO.:	
PUSH SWITCH / VERTICAL		AP-11E01N	
DR: Ricky		DWG NO.:	
2015/03/19		ADJ-11E01	
CHKD: Ricky		SCALE	
2015/03/19		SHEET	
		1/1	
		REV.	
		A	
		CUSTOMER	
		DRAWING	