


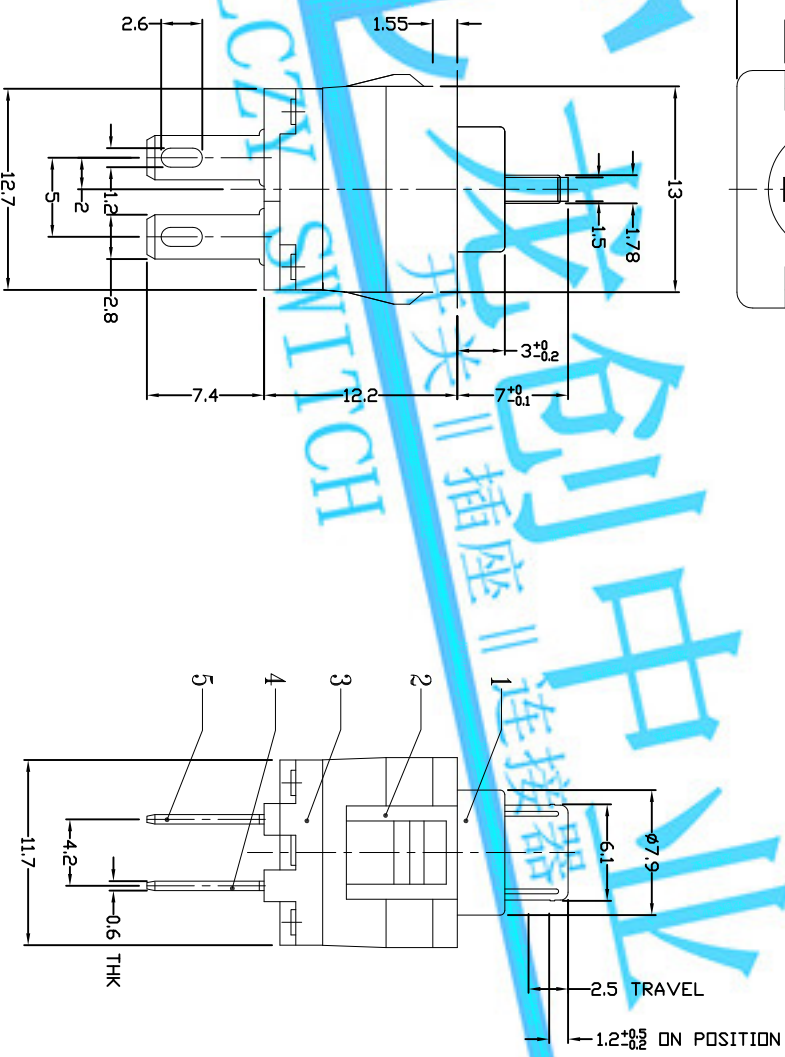


DIMENSIONS

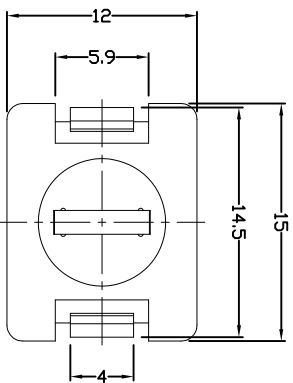

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC30V 0.1A	
CIRCUIT	1P1T	
CONTACT RESISTANCE	30mΩ MAX.	
TIMING		
OPERATING MODE	NON-LDCK	
STROKE	FULL 2.5mm	DN 1.2±0.5mm
OPERATING FORCE	100±30gf	
OPERATING LIFE(cycles)	10,000	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE: PUSH SWITCH / VERTICAL				PART NO.: AP-11E04N					
DR: <i>Rocky</i> 2015/03/19				DWG NO.: ADJ-11E04					
CHKD: <i>Rocky</i> 2015/03/19				SCALE SHEET REV. CUSTOMER DRAWING					
APPD:				2:1		1/1		A	
									
UNITS				mm					
WITHIN 1.5mm: ±0.1mm				OVER 1.5mm: ±0.2mm					
MAT'L				SEE NOTE					
FINISH				SEE NOTE					
SEE NOTE				Q'TY					
8									
7				SPRING		STAINLESS STEEL WIRE			
6				CONTACT		SUS			
5				U-TERMINAL		BRASS STRIP			
4				V-TERMINAL		BRASS STRIP			
3				CASE		NYLON+G			
2				COVER		PC			
1				KNDB		PDM			
ND.				PARTS		MATERIAL			