






RoHS
Compliant
2002/95/EC

DIMENSIONS

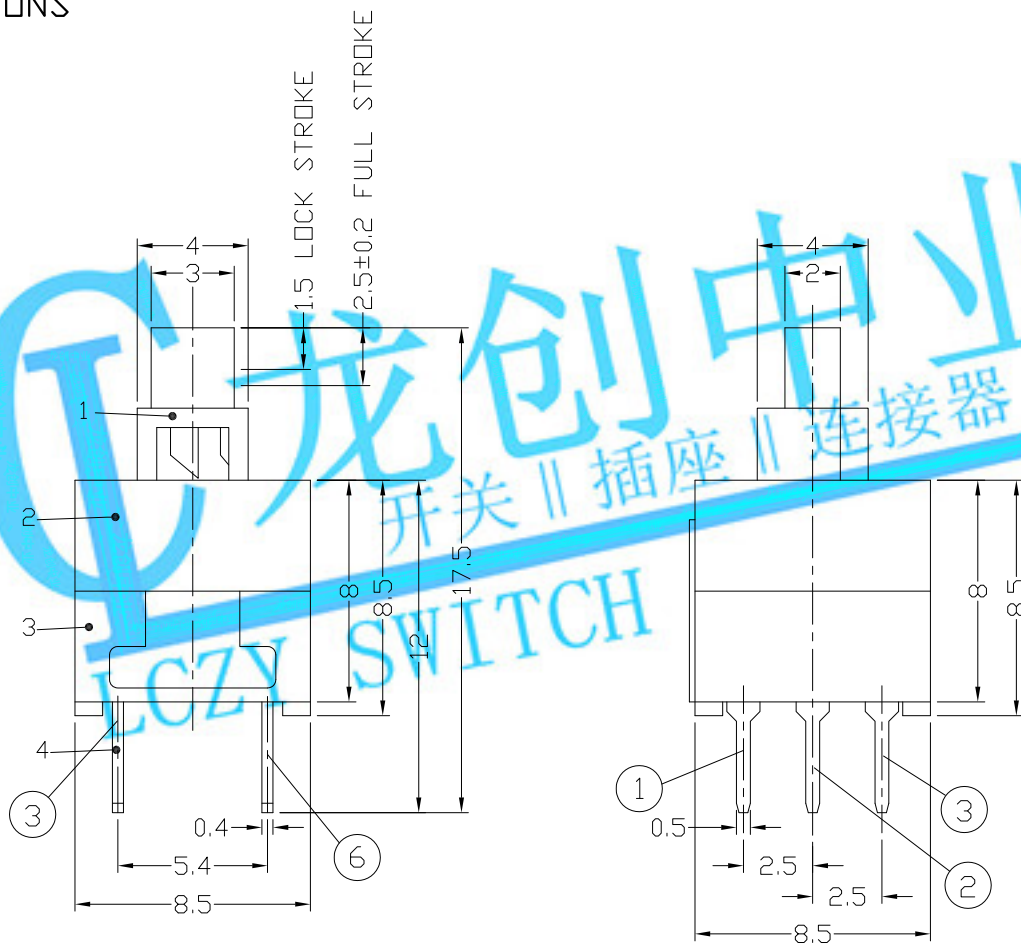

P.C.B LAYOUT

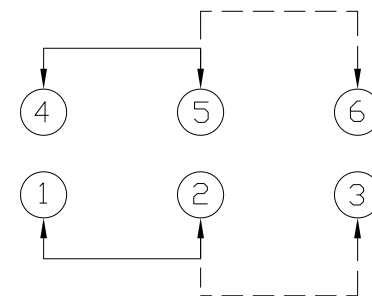

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC40V 0.1A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	50mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-2214L
	NON-LOCK	AP-2214N
STROKE	FULL 2.5mm	LOCK 1.5mm
OPERATING FORCE	180±60gf	250±100gf
OPERATING LIFE(cycles)	10,000	

7	SPRING PLATE/CAM/STICK	PBS	2	Ag CLAD	WITHIN 1.5mm: ±0.1mm
6	SPRING	SUS WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm
5	LOCK PIN	SUS WIRE	1	Ni PLATED	
4	TERMINAL	BRASS STRIP	6	Ag PLATED	
3	CASE	NYLON+F.G	1	BLACK	
2	COVER	NYLON+F.G	1	BLACK	
1	KNOB	POM	1	NATURAL	
NO	PARTS	MATERIAL	QTY	FINISHING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE: PUSH SWITCH / VERTICAL		PART NO.: AP-2214L & AP-2214N	
Q'TY	SEE NOTE	DR: Ricky 2017/05/15		DWG NO.: AZJ-2214	
		CHKD: Ricky 2017/05/15			
		APPD:		SCALE	SHEET
				5:1	1/1
				REV.	CUSTOMER
				A	DRAWING