

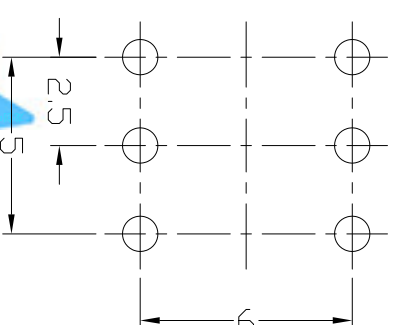


DIMENSIONS

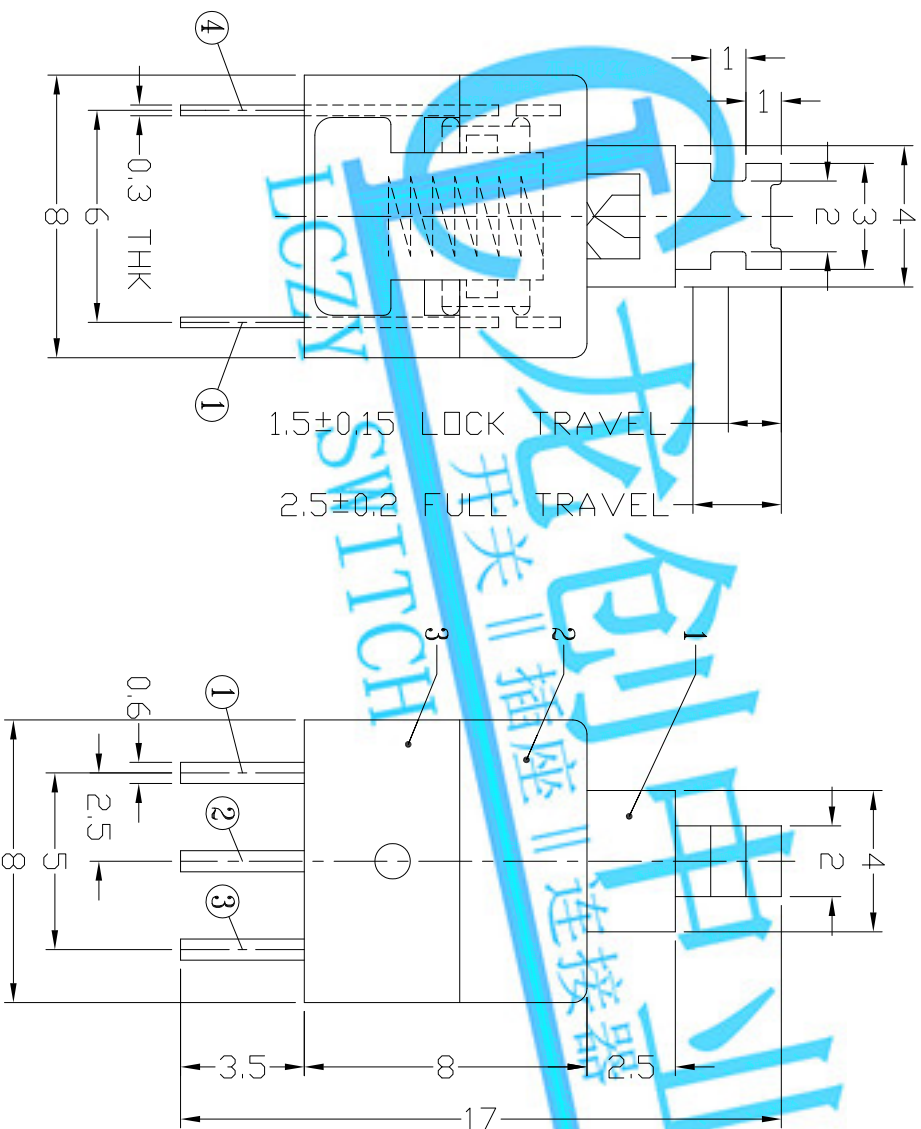

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC30V 0.1A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	50mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-2215L
	NON-LOCK	AP-2215N
STROKE	FULL 2.5mm	LOCK 1.5mm
OPERATING FORCE	200±100gf	
OPERATING LIFE(cycles)	10,000	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:			PART NO.:						
PUSH SWITCH / VERTICAL			AP-2215L & AP-2215N						
DR: Rocky 2014/05/06			DWG NO.: ADJ-2215						
CHKD: Rocky 2014/05/06			SCALE		SHEET		REV.		
APPD:			4:1		1/1		A		
			CUSTOMER DRAWING						
UNITS mm									
MAT'L									
OVER 1.5mm: ±0.1mm									
OVER 1.5mm: ±0.2mm									
SEE NOTE									
FINISH									
SEE NOTE									
Q'TY									
									
									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTCH INC. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTCH INC.									
NOD PARTS MATERIAL			QTY			FINISHING			
2 COVER			1			WHITE			
1 KNOB			1			BLUE			
6 SPRING			1			NATURAL			
5 CONTACT			2			Ag CLAD			
4 CAM STICK			1			WASHING			
3 CASE			1			BLACK/Ag PLATED OVER N PLATED			
2 COVER			1			WHITE			
1 KNOB			1			BLUE			
NOD PARTS MATERIAL			QTY			FINISHING			