






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

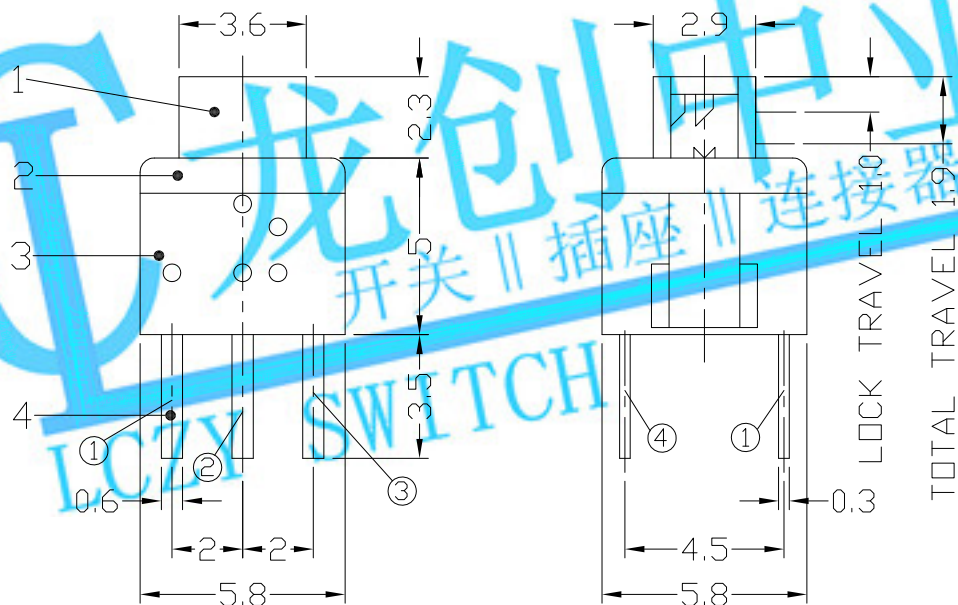

P.C.B LAYOUT
TOP VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 0.1A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	70mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-2216FL
	NON-LOCK	AP-2216FN
STROKE	FULL 1.9mm	LOCK 1.0mm
OPERATING FORCE	180±60gf	250±100gf
OPERATING LIFE(cycles)	10,000	

7	CONTACT	PBS	2	AG COATING	WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
6	SPRING	SUS WIRE	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L				
5	LOCK PIN	SUS WIRE	1	Ni PLATED		SEE NOTE	TITLE:		PART NO.:	
4	TERMINAL	BRASS STRIP	6	Ag PLATED			PUSH SWITCH / VERTICAL		AP-2216FL & AP-2216FN	
3	COVER	POM	1	BLACK		FINISH	DR: Ricky 2017/05/15		DWG NO.:	
2	CASE	NYLON+F.G	1	GREY		SEE NOTE	CHKD: Ricky 2017/05/15		AZJ-2216F	
1	KNOB	POM	1	WHITE		Q'TY	APPD:		SCALE	SHEET
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		6:1		1/1	REV.
							A		CUSTOMER DRAWING	