






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

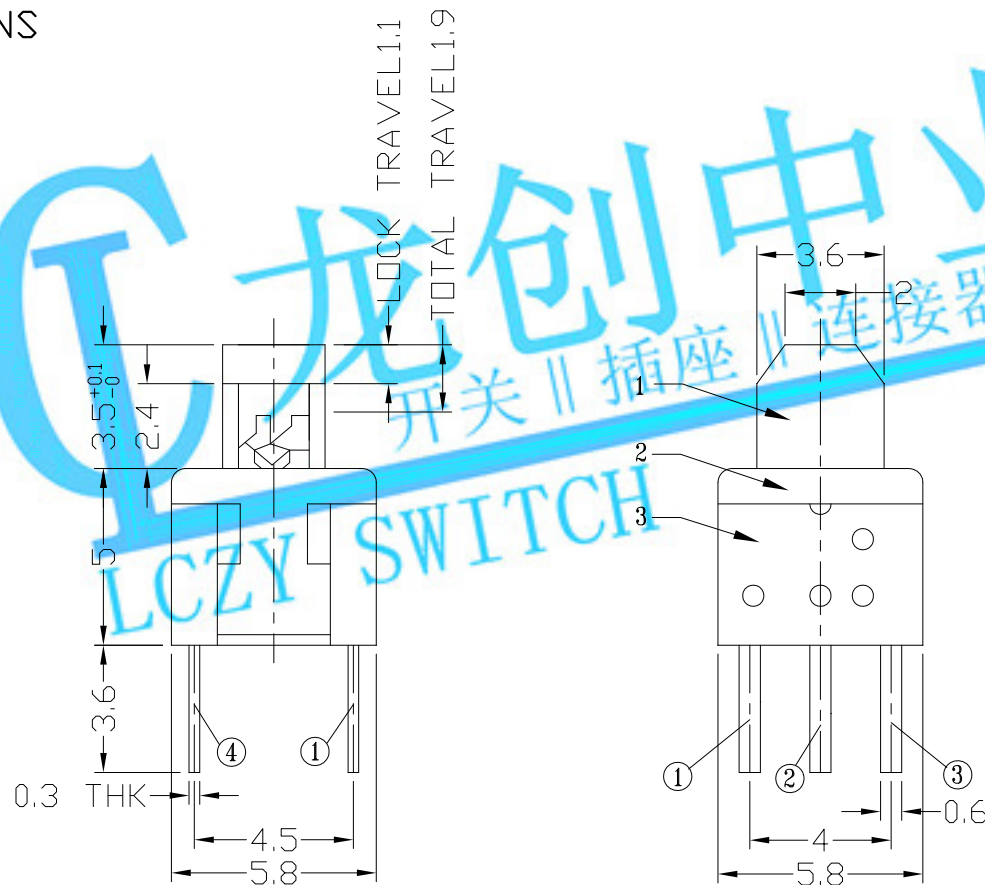

P.C.B LAYOUT



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 0.1A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	70mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-2216GL
	NON-LOCK	AP-2216GN
STROKE	FULL 1.9mm	LOCK 1.1mm
OPERATING FORCE	150±50gf	250±100gf
OPERATING LIFE(cycles)	10,000	

6					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
5	CAM STICK	SUS	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L						
4	SPRING	SUS	1	NATURAL		SEE NOTE	TITLE:		PART NO.:			
3	CASE	NYLON+F.G/BRASS STRIP	1	GREY/Ag PLATED OVER Ni PLATED		FINISH	PUSH SWITCH / VERTICAL		AP-2216GL & AP-2216GN			
2	COVER	POM	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	DR: Ricky 2015/03/25		DWG NO.:			
1	KNOB	POM/PBS C5210R-EH	1	WHITE/Ag CLAD		Q'TY	CHKD: Ricky 2015/03/25		ADJ-2216G			
NO	PARTS	MATERIAL	QTY	FINISHING			APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
									5:1	1/1	A	