
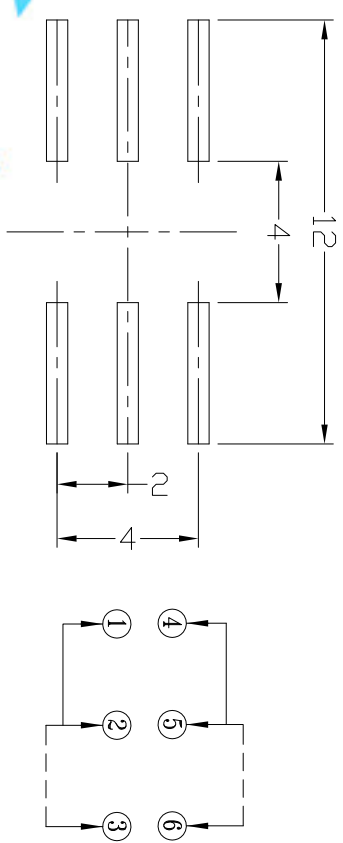
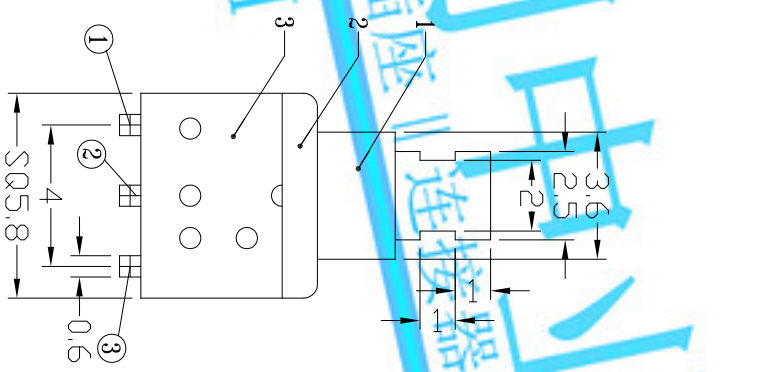


DIMENSIONS

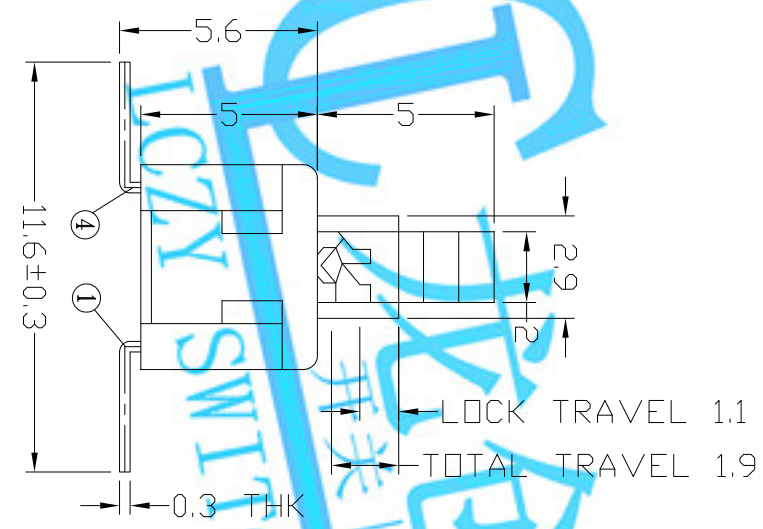

ELECTRD-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 0.1A	
CIRCUIT	2P2T	
CONTACT RESISTANCE	70mΩ MAX.	
TIMING	NDN-SHORTING	
	SELF-LDCK	AP-2216SL
OPERATING MDDE	NDN-LDCK	AP-2216SN
STROKE	FULL 1.9mm	LDCK 1.1mm
OPERATING FORCE	150±50gf	250±100gf
OPERATING LIFE(cycles)	10,000	

6						UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
5	CAM STICK	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm	MAT'L	TITLE:		PART NO.:		
4	SPRING	SUS	1	NATURAL	OVER 1.5mm: ±0.2mm		PUSH SWITCH / VERTICAL		AP-2216SL & AP-2216SN		
3	CASE	NYLON+F.G/BRASS STRIP	1	GREY/Ag PLATED OVER NI PLATED		FINISH	DR: Jockey 2015/03/25		DWG NO.: ADJ-2216S		
2	COVER	POM	1	BLACK		SEE NOTE	CHKD: Jockey 2015/03/25		SCALE SHEET REV. CUSTOMER DRAWING		
1	KNOB	POM/PBS C5210R-EH	1	WHITE/Ag CLAD	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	APPD:		5:1 1/1 A		
ND	PARTS	MATERIAL	QTY	FINISHING							