
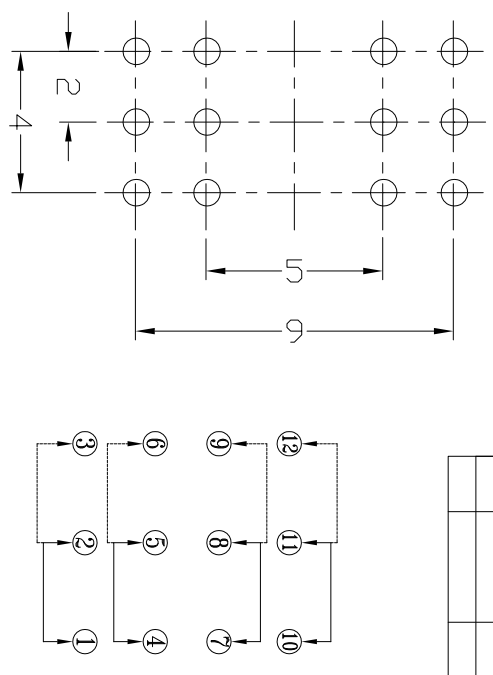


DIMENSIONS

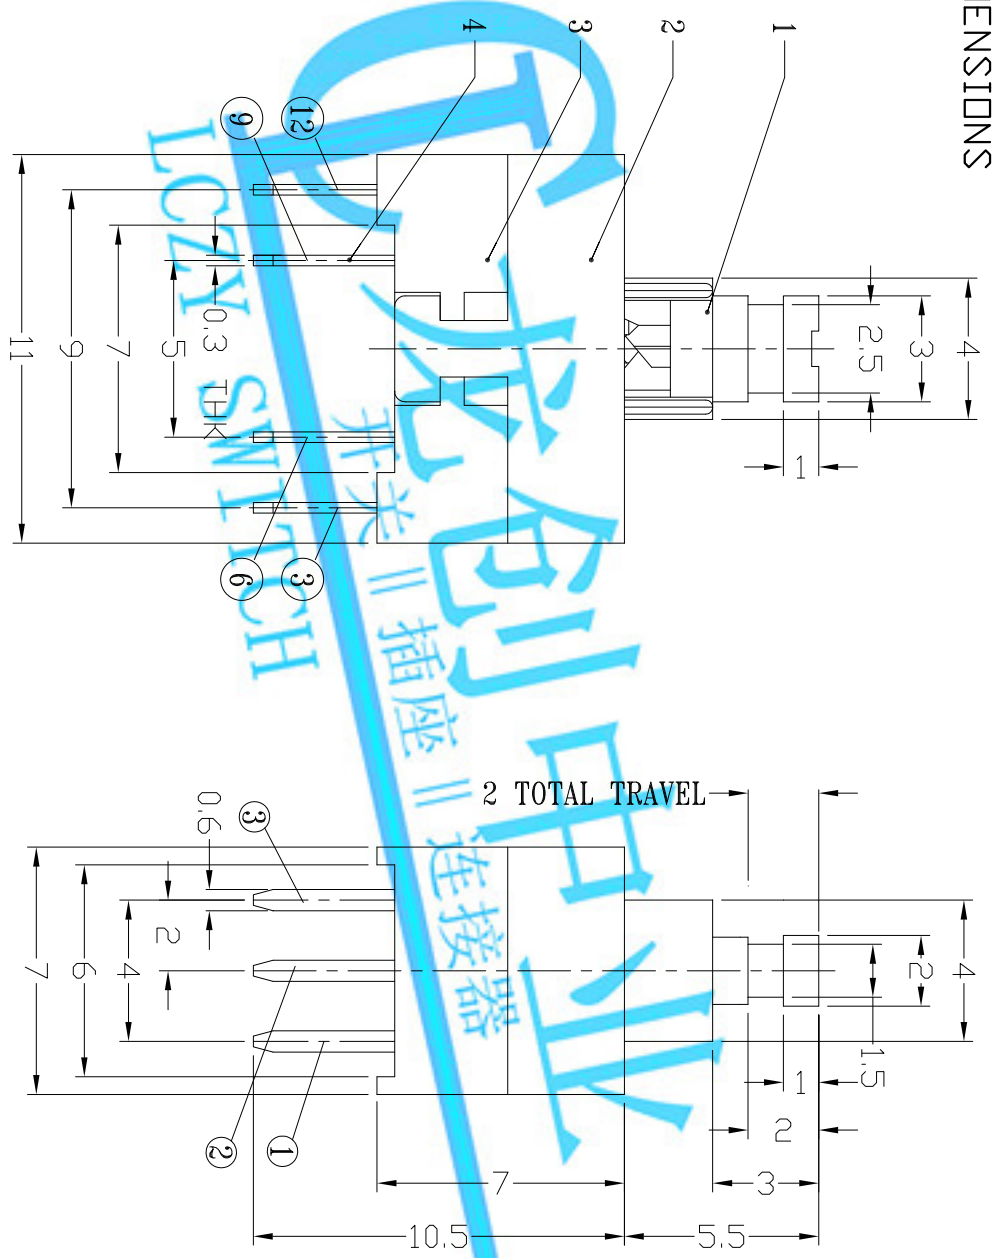

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC30V 0.1A
CIRCUIT	4P2T
CONTACT RESISTANCE	70mΩ MAX.
TIMING	NON-SHORTING
OPERATING MODE	NON-LOCK
STROKE	FULL 2.0mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

6	SUS	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm
5	PBS CS210R-EH	4	Ag CLAD	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE
4	PBT/BRASS STRIP	4	BLACK/Ag PLATED OVER Ni PLATED		TITLE:	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
3	PA66	1	BLACK		FINISH	PART NO.: AP-4201N
2	POM	1	BLACK		SEE NOTE	
1	POM	1	WHITE		Q'TY	DR: 2015/03/23
ND	POM	1	WHITE		CHKD: 2015/03/23	DWG NO.: ADJ-4201
	POM	1	WHITE		APPD: 2015/03/23	SCALE SHEET 1/1
	POM	1	WHITE			REV. A
	POM	1	WHITE			CUSTOMER DRAWING