




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

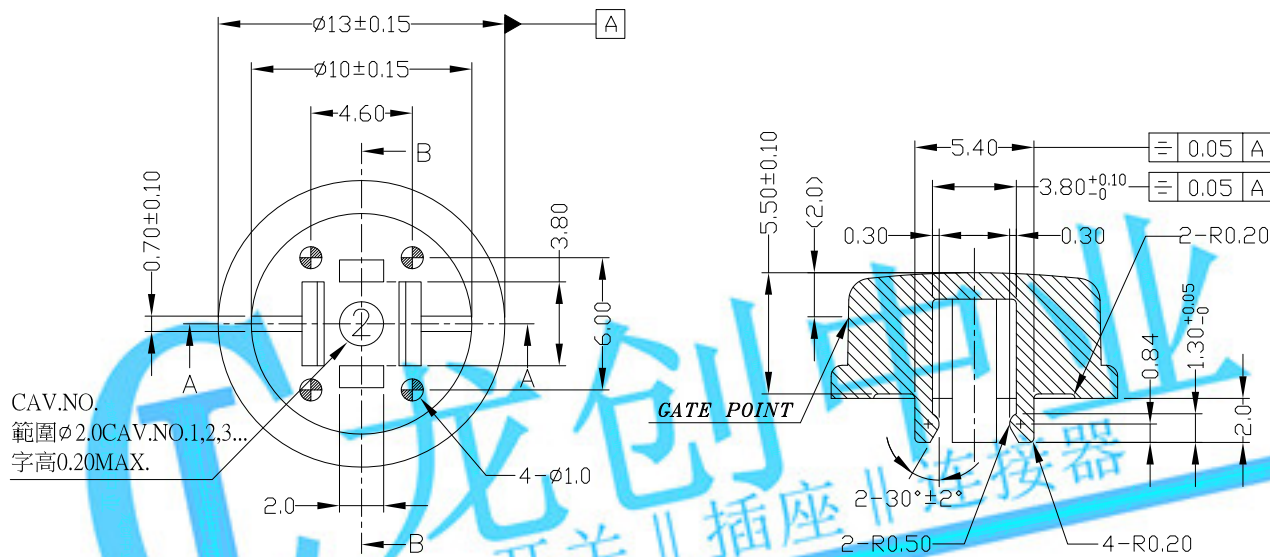

CAV.NO.
範圍 $\phi 2.0$ CAV.NO.1,2,3...
字高0.20MAX.

MODEL CODE:



1273R-
R=CIRCULAR(圓形)

COLOR:
Y=YELLOW(黃色)
B=BLUE(藍色)
R=RED(紅色)
I=IVORY(象牙色)
K=BLACK(黑色)
G=GREEN(綠色)
S=SALMON(橙色)
Ge=GREY(灰色)

*OPERATION TEMPERATURE RANGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
*STORAGE TEMPERATURE RANGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

NOTE:

- 1.General Tolerance : $\pm 0.05\text{mm}$ MAX.
- 2.SUB GATE,在 $\phi 11.5$ 圓周上任一位置,設置一 $\square$:MAX 0.7mm,GATE RUNNER折斷後之毛邊翹起量,不得超出0.05mm.
- 3.C-C以上,模具表面請拋光.

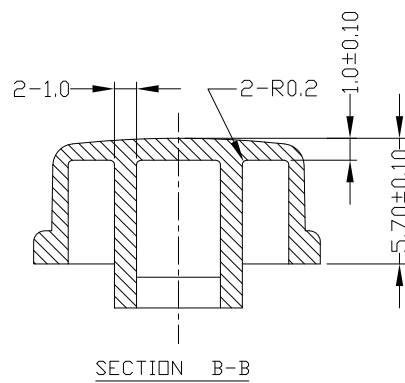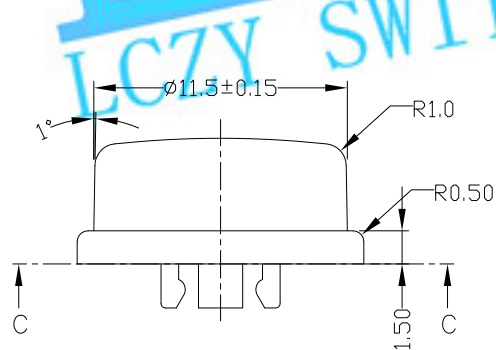

						UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
						mm							
						MAT'L	TITLE:		PART NO.:				
						SEE NOTE	CAP (FOR 1103T)		1273R				
						FINISH	DR: Ricky 2014/04/18		DWG NO.:				
						SEE NOTE	CHKD: Ricky 2014/04/18		ATD-1273R				
						Q'TY	APPD:		SCALE		SHEET	REV.	CUSTOMER
									1:1		1/1	A	DRAWING
1	CAP	ABS	1		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.								
NO	PARTS	MATERIAL	QTY										
1		2		3		4		5		6		7	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.