



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

MODEL CODE:



NOTE:

- 1.General Tolerance : $\pm 0.05\text{mm}$ MAX.
- 2.針對GATE,設於左側面:MAX 0.7mm
GATE RUNNER折斷後之毛邊翹起量,
不得超出0.05mm.
- 3.C-C以上,模具表面請拋光.

1273S-
S=SQUARE(方形)
COLOR:
Y=YELLOW(黃色)
B=BLUE(藍色)
R=RED(紅色)
I=IVORY(象牙色)
K=BLACK(黑色)
G=GREEN(綠色)
S=SALMON(橙色)
Ge=GREY(灰色)

*OPERATION TEMPERATURE RANGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

*STORAGE TEMPERATURE RANGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

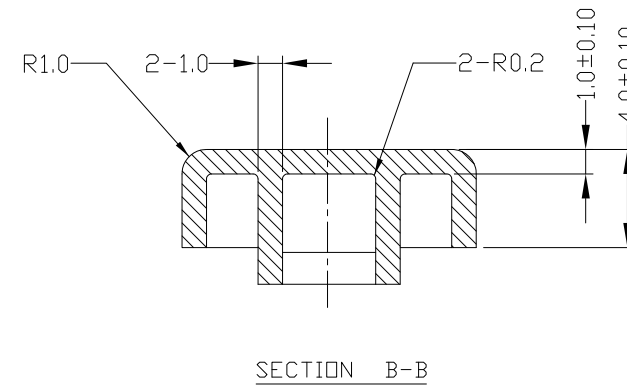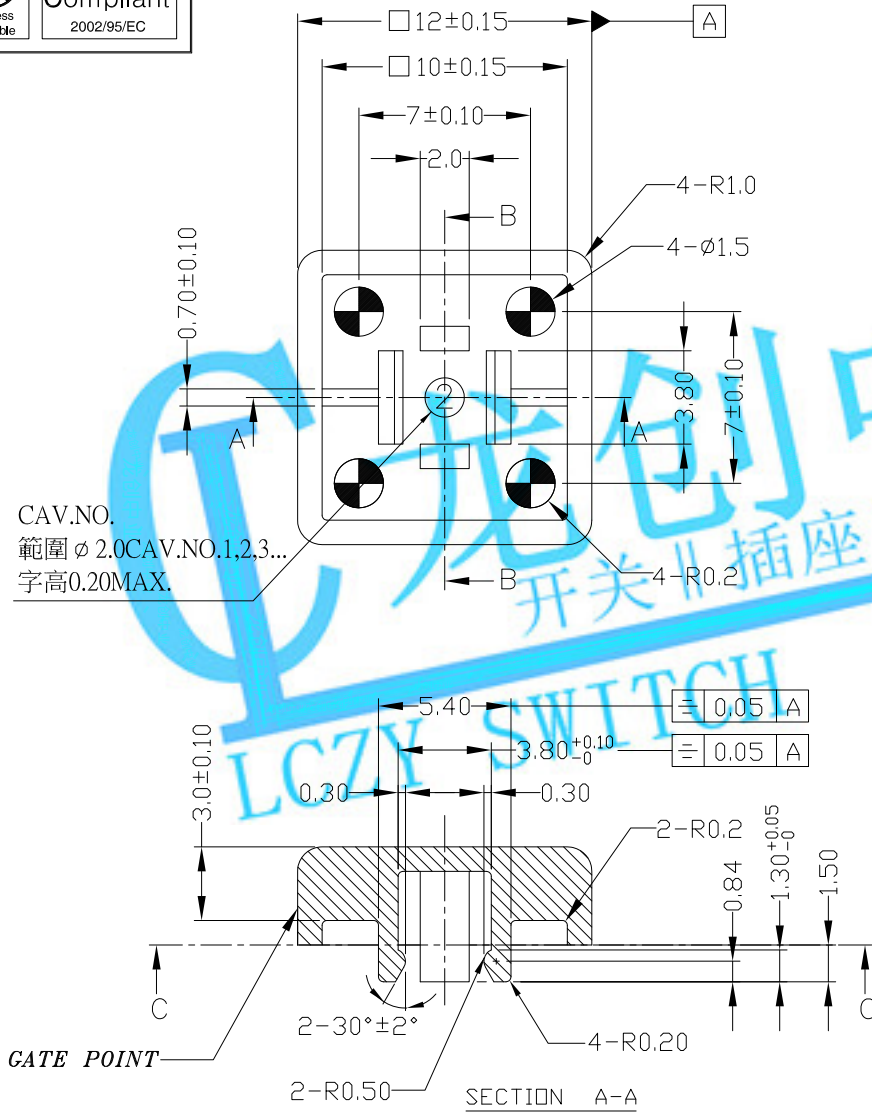

				UNITS		LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
				mm					
				MAT'L					
				SEE NOTE		TITLE:		PART NO.:	
				FINISH		CAP (FOR 1103T)		1273S	
				SEE NOTE		DR: Ricky 2014/04/17		DWG NO.:	
				Q'TY		CHKD: Ricky 2014/04/17		ATD-1273S	
						APPD:		SCALE	SHEET
								1:1	1/1
								REV.	CUSTOMER
								A	DRAWING
1	CAP	ABS	1						
NO	PARTS	MATERIAL	QTY						

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.