





DIMENSIONS


CIRCUIT DIAGRAM

PRODUCT IMAGE

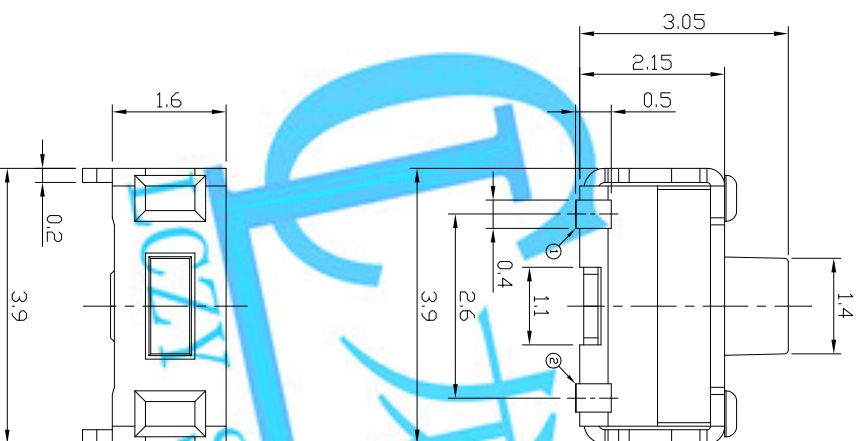

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

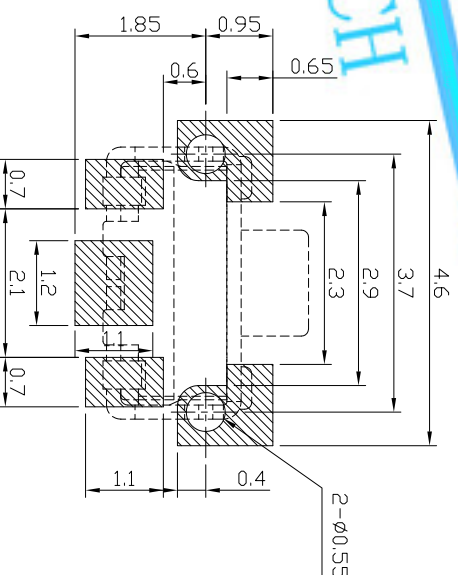

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.15 ± 0.1mm
Operating Force	160±50gf
Operating Life(cycles)	100,000

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

					X. ±0.2	X. ±2*	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
							MAT'L	
							SEE NOTE	
							FINISH	
							SEE NOTE	
							TITLE:	
							TACT SWITCH	PART NO.: AT-1179GS SERIES
							DR: <i>Sucky</i> 2018/05/11	DWG NO.: ASI-1179GS
							CHKD: <i>Sucky</i> 2018/05/11	SCALE SHEET REV. 1:1 1/1 B
							APPD:	CUSTOMER DRAWING
								