

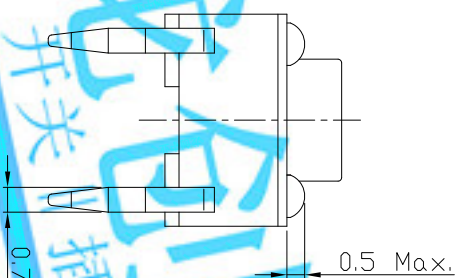


DIMENSIONS

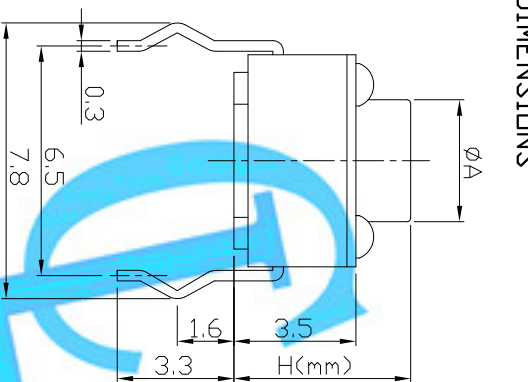

CIRCUIT DIAGRAM



PRODUCT IMAGE





MODEL CODE

AT-1102-

	H	ØA
-	4.3	3.5
AS	4.5	3.5
A	5.0	3.5
AL	5.5	3.4
Q	6.0	3.4
QL	6.5	3.4
B	7.0	3.4
E	7.3	3.4
EL	7.5	3.4
C	8.0	3.4
CL	8.5	3.4
DS	9.0	3.4
D	9.5	3.4
DL	10.0	3.0
KS	10.5	3.0
K	11.0	3.0
KL	11.5	3.0
FS	12.0	3.0
F	12.5	3.0
FL	13.0	3.0
G	13.5	3.0
D	14.0	3.0
X	14.5	3.0
Y	15.0	3.0
Z	16.0	3.0
J	16.5	3.0
I	17.0	3.0
T	22.4x24	
TA	28x28	

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

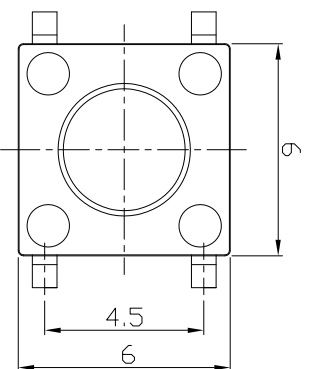

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications


Rating	DC 12V 50mA		
Contact Resistance	100m Ω Max.		
Travel	0.25 $\pm$ 0.1mm		
Operating Force	130,160 $\pm$ 30gf	250 $\pm$ 50gf	
	100,000	Phosphor Bronze	
Operating Life(cycles)	200,000	Stainless Steel	

UNITS	mm
MAT'L	
SEE NOTE	
FINISH	
SEE NOTE	
Q'TY	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INDEUTH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INDEUTH INC.



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



LONGCHUANG ZHONGYE (HK) CO., LIMITED

TITLE:	PART NO.:
--------	-----------

TACT SWITCH	AT-1102 SERIES
-------------	----------------

DR: Ricka, 2014/03/18

CHKD: 20110010	ASI-1102
----------------	----------

APPD: _____

DWG NO.:			
ASI-1102			
SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	A	