





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

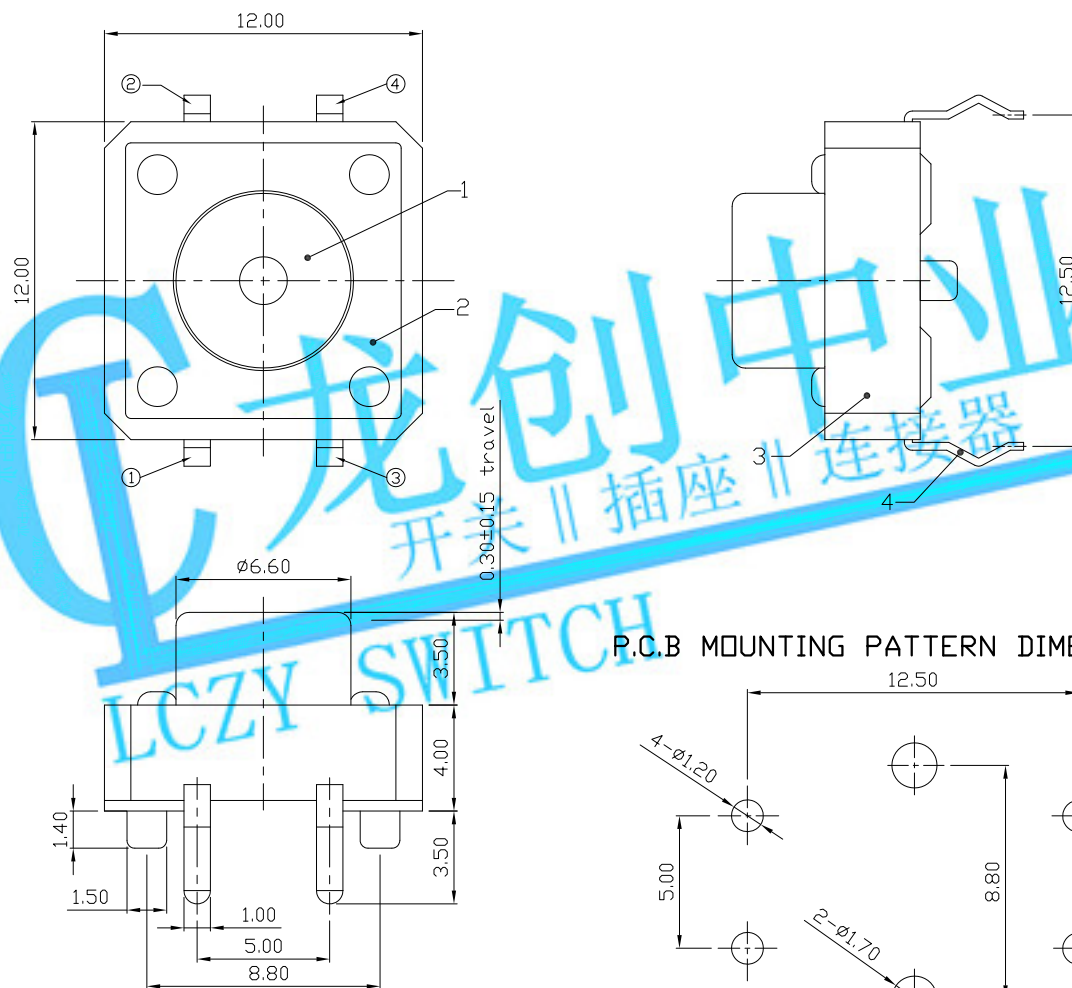

CIRCUIT DIAGRAM



P.C.B MOUNTING PATTERN DIMENSION

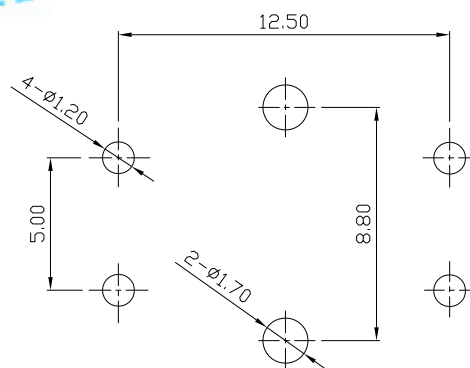

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100m Ω Max.	
Travel	0.30 ± 0.15 mm	
Operating Force	160 $\pm$ 50gf	250 $\pm$ 100gf
Operating Life(cycles)	100,000	

5	SPRING PLATE	PBS	1	Ag CALD	WITHIN 1.5mm;±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
4	TERMINAL	BRASS STRIP	4	Ag COATING	OVER 1.5mm;±0.2mm	MAT'L						
3	CASE	NYLON+F.G	1	BLACK		SEE NOTE	TITLE:		PART NO.:			
2	COVER	MILD STEEL	1	Ni COATING		FINISH	TACT SWITCH		AT-1103EB SERIES			
1	KNOB	NYLON+F.G	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	DR: Ricky 2017/08/02		DWG NO.:			
						Q'TY	CHKD: Ricky 2017/08/02		AZJ-1103EB			
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
									4:1	1/1	A	