



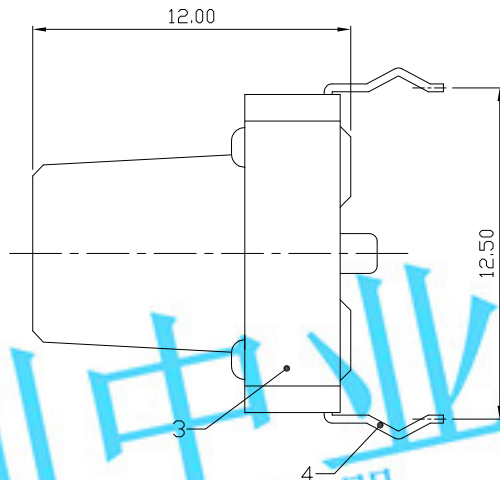


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

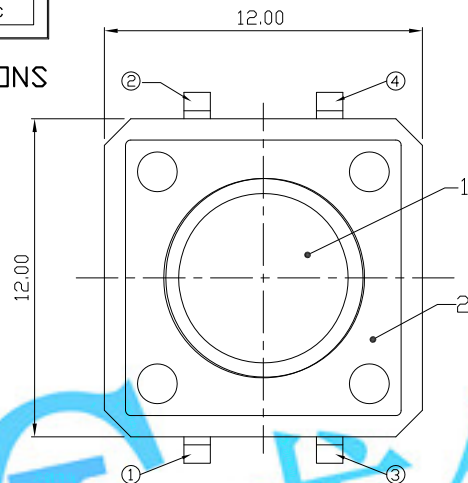

CIRCUIT DIAGRAM



P.C.B MOUNTING PATTERN DIMENSION

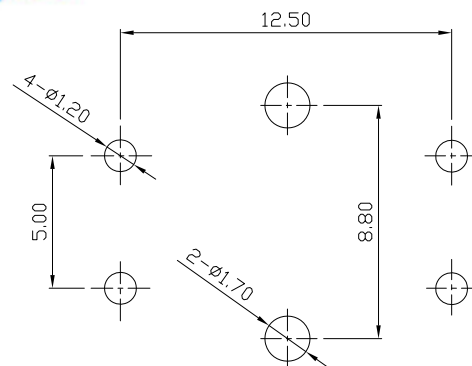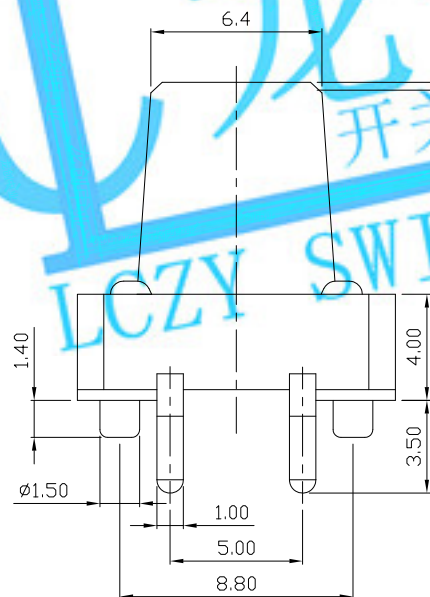

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.30±0.15mm	
Operating Force	160±50gf	250±100gf
Operating Life(cycles)	100,000	

5	SPRING PLATE	PBS	1	Ag CALD	WITHIN 1.5mm:±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
4	TERMINAL	BRASS STRIP	4	Ag COATING	OVER 1.5mm:±0.2mm	MAT'L						
3	CASE	NYLON+F.G	1	BLACK		SEE NOTE	TITLE:		PART NO.:			
2	COVER	MILD STEEL	1	Ni COATING		FINISH	TACT SWITCH		AT-1103ED SERIES			
1	KNOB	NYLON+F.G	1	GREY	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	DR: <i>Ricky</i> 2017/08/03		DWG NO.:			
						Q'TY	CHKD: <i>Ricky</i> 2017/08/03		AZJ-1103ED			
							APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
NO.	PARTS	MATERIAL	Q'TY	FINISHING					4:1	1/1	A	