





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

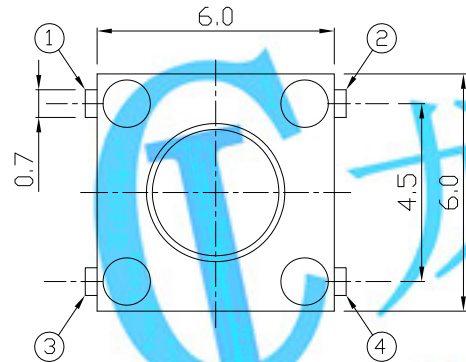

P.C.B MOUNTING PATTERN DIMENSION


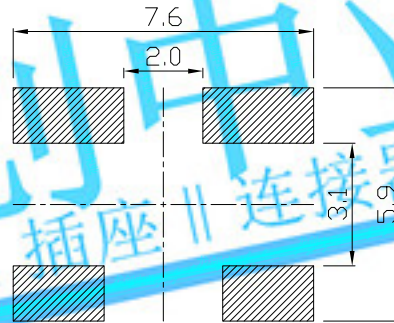


CIRCUIT DIAGRAM



MODEL CODE

AT-1102SJ-		H
-		4.3
A		5.0
Q		6.0
B		7.0
E		7.3
C		8.0
CL		8.5
D		9.5
F		12.5
FL		13.0
I		17.0

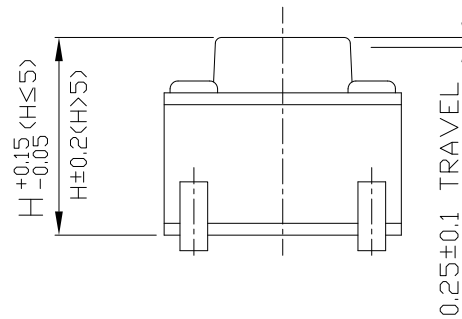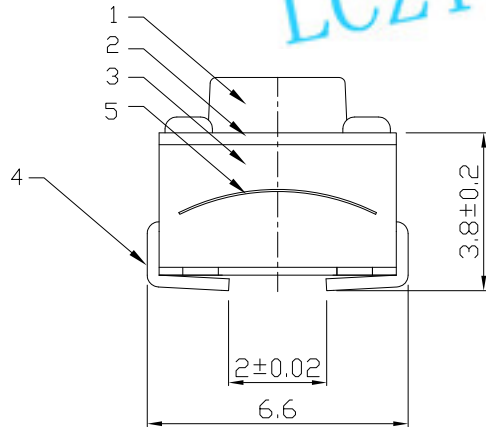

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.25±0.1mm		
Operating Force	100±50gf	130±50gf	160±50gf
	250±100gf	320±100gf	
Operating Life(cycles)	100,000		

5	CONTACT	PBS/SUS	1	Ag CLAD	WITHIN 1.5mm ±0.1	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
4	TERMINAL	BRASS STRIP	4	Ag PLATED	OVER 1.5mm ±0.2						
3	CASE	NYLON+F.G	1	BLACK		FINISH SEE NOTE	TITLE: TACT SWITCH		PART NO.: AT-1102SJ SERIES		
2	COVER	MILD STEEL	1	NI PLATED			DR: <i>Ricky</i> 2017/09/19		DWG NO.: AZJ-1102SJ		
1	KNOB	NYLON+F.G	1	BLACK	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	CHKD: <i>Ricky</i> 2017/09/19				
NO.	PART NAME	MATERIAL	QTY.	FINISHING			APPD:		SCALE	SHEET	REV.
								8:1	1/1	A	DRAWING