



RoHS
Compliant
2002/95/EC





REV.	ECN.	NO.	APPD.

DIMENSIONS

CIRCUIT DIAGRAM


PRODUCT IMAGE

MODEL CODE

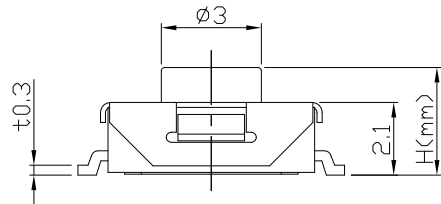



AT-1157 ☐ ☐ NP

	L		H
A	8	S	2.5
B	10	B	2.7
		H	3.1
		Q	3.4

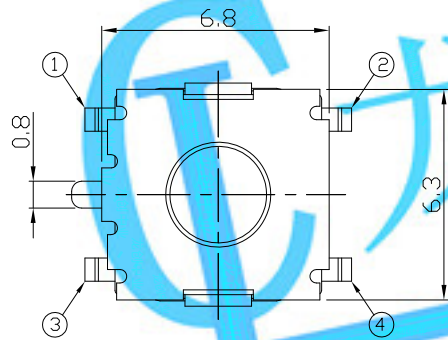

P.C.B MOUNTING PATTERN DIMENSION
The following soldering patterns are recommended for reflow soldering

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

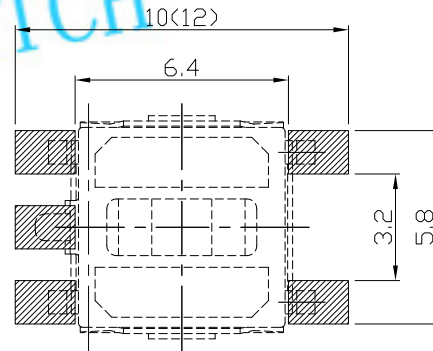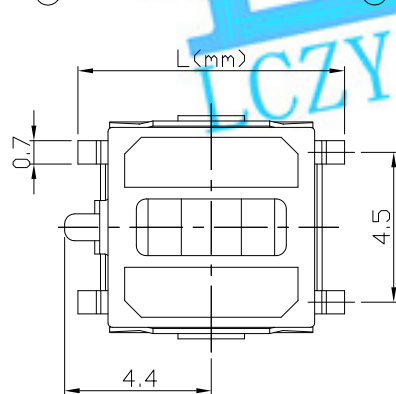

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.25 ± 0.1mm	
Operating Force	100,130,160±30gf	250±50gf
Operating Life(cycles)	100,000	Phosphor Bronze
	200,000	Stainless Steel

.X ±0.3	X. ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
		MAT'L				
		SEE NOTE				
		FINISH				
		SEE NOTE				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	TITLE: TACT SWITCH		PART NO.: AT-1157XXNP SERIES	
			DR: <i>Ricky</i> 2014/03/28		DWG NO.: ASI-1157XXNP	
			CHKD: <i>Ricky</i> 2014/03/28			
			APPD: <i>Ricky</i> 2014/03/28			
			SCALE	SHEET	REV.	CUSTOMER
			1:1	1/1	A	DRAWING