





RoHS  
Compliant  
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
|      |      |     |       |
|      |      |     |       |
|      |      |     |       |

## DIMENSIONS

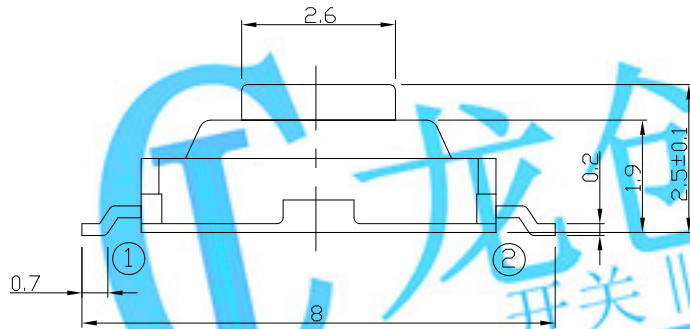

## CIRCUIT DIAGRAM





## PRODUCT IMAGE



LCZY SWITCH

**P.C.B MOUNTING PATTERN DIMENSION**  
The following soldering patterns are recommended for reflow soldering

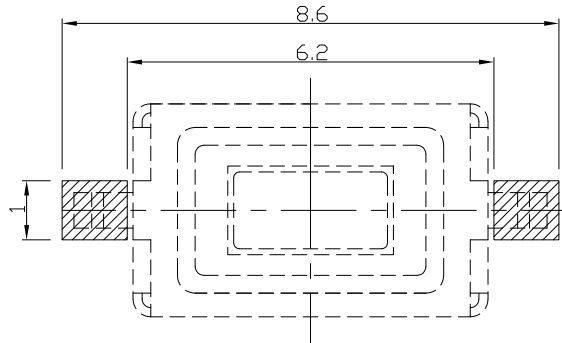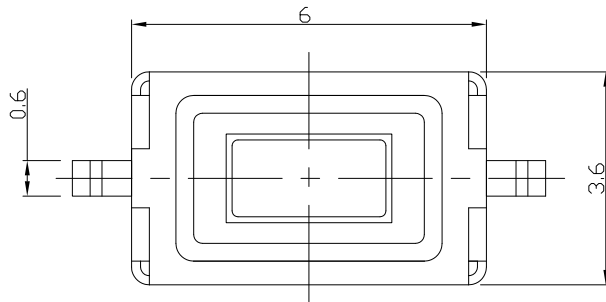

**ELECTRO-MECHANICAL CHARACTERISTICS**  
Refer to additional specifications

|                        |              |          |  |
|------------------------|--------------|----------|--|
| Rating                 | DC 12V 50mA  |          |  |
| Contact Resistance     | 100mΩ Max.   |          |  |
| Travel                 | 0.25 ± 0.1mm |          |  |
| Operating Force        | 160,180±30gf | 250±50gf |  |
| Operating Life(cycles) | 50,000       | 30,000   |  |

.X ±0.2

X. ±2°

UNITS mm


MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE:  
TACT SWITCH

PART NO.:  
AT-1181 SERIES

DR: Ricky 2014/03/28

DWG NO.: ASI-1181

CHKD: Ricky 2014/03/28

APPD:

| SCALE | SHEET | REV. | CUSTOMER DRAWING |
|-------|-------|------|------------------|
| 1:1   | 1/1   | A    |                  |