




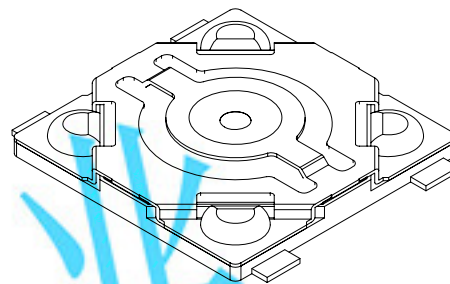


DIMENSIONS

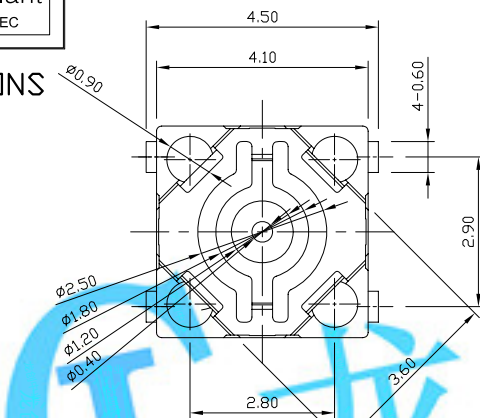



3D VIEW



CIRCUIT DIAGRAM

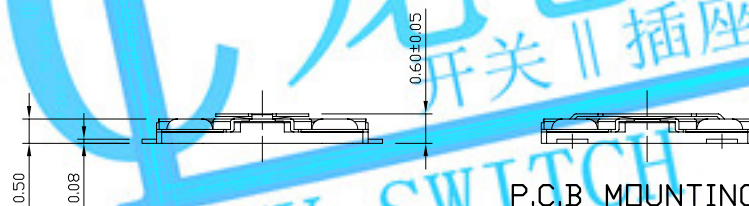

P.C.B MOUNTING PATTERN DIMENSION

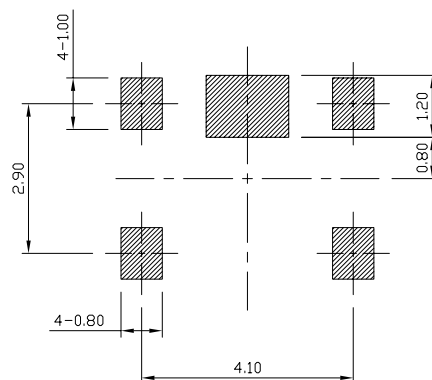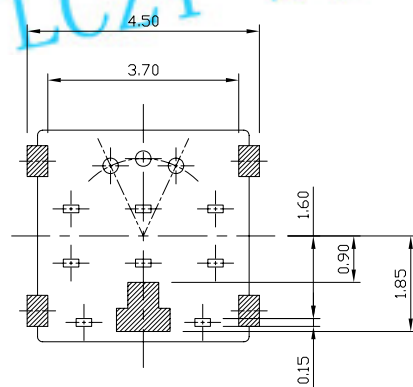

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	DC12V 50mA	
CONTACT RESISTANCE	100mΩ MAX.	
TRAVEL	0.2±0.1mm	
OPERATING FORCE	180±50gf	250±50gf
OPERATING LIFE(cycles)	100,000	

8						.X ±0.2	X. ±2°	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
7						.XX ±0.1		MAT'L	TITLE:			PART NO:				
6								SEE NOTE	TACT SWITCH			AT-1182S SERIES				
5								FINISH	DR: <i>Ricky</i> 2015/05/11			DWG NO:				
4								SEE NOTE	CHKD: <i>Ricky</i> 2015/05/11			AKS-1182S				
3						THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	APPD:			SCALE	SHEET	REV.	CUSTOMER	
2												5:1	1/1	A	DRAWING	
1																
NO.	PARTS	MATERIAL		Q'TY	FINISHING											
	1		2		3		4		5		6		7			