




RoHS
Compliant
2002/95/EC


REV.	ECN.	NO.	APPD.

DIMENSIONS

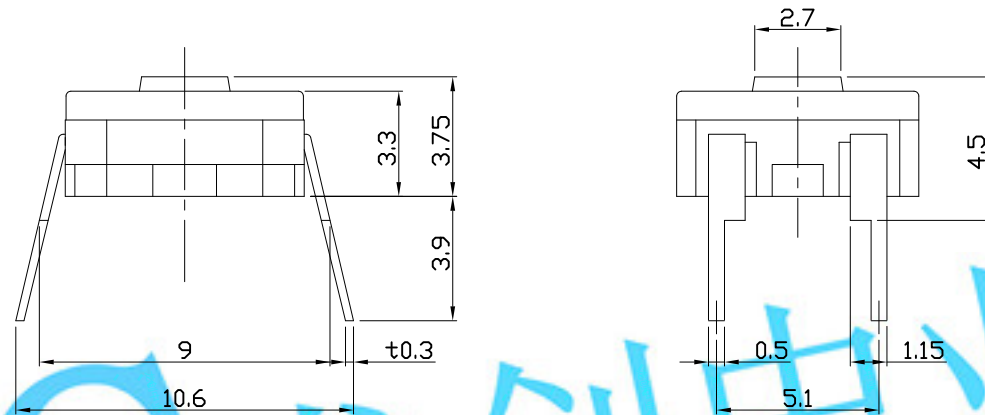


P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

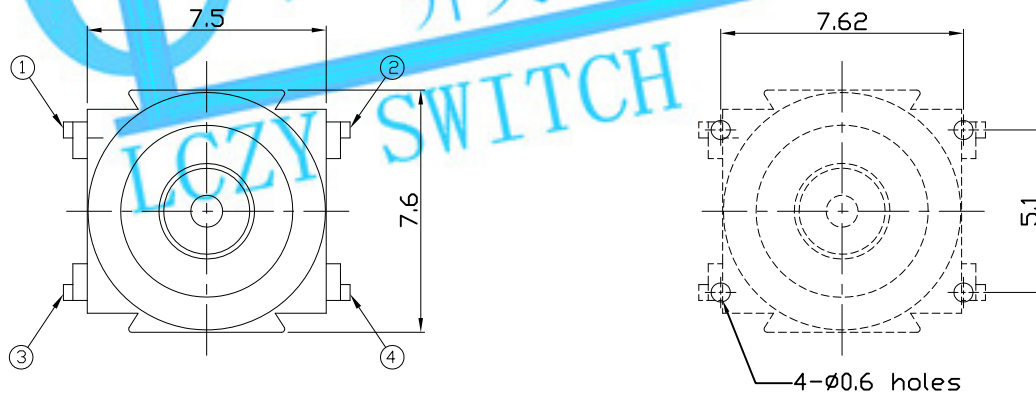

CIRCUIT DIAGRAM



PRODUCT IMAGE



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 0.1A	
Contact Resistance	100mΩ Max.	
Insulation Resistance	100MΩ<DC 500V / 1 min> Min.	
Withstanding Voltage	250 VAC / min.	
Travel	0.45 ± 0.15mm	
Operating Force	300±80gf	160±50gf
Operating Life(cycles)	100,000	

.X ±0.3

X. ±2°

UNITS

mm


MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE:
TACT SWITCH Soft feeling

PART NO.:
AT-1155 SERIES

DR: Ricky 2014/04/01

DWG NO.:
ASI-1155

CHKD: Ricky 2014/04/01

APPD:

SCALE	SHEET	REV.	CUSTOMER
1:1	1/1	A	DRAWING