





RoHS
Compliant
2002/95/EC


REV.	ECN.	NO.	APPD.

DIMENSIONS

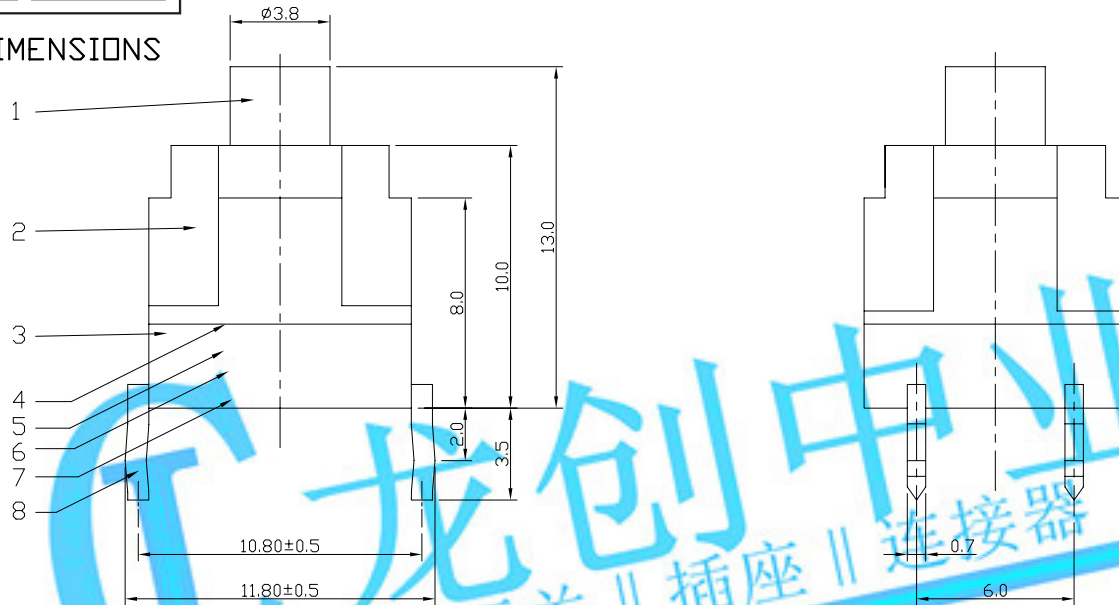

CIRCUIT DIAGRAM

P.C.B MOUNTING PATTERN DIMENSION

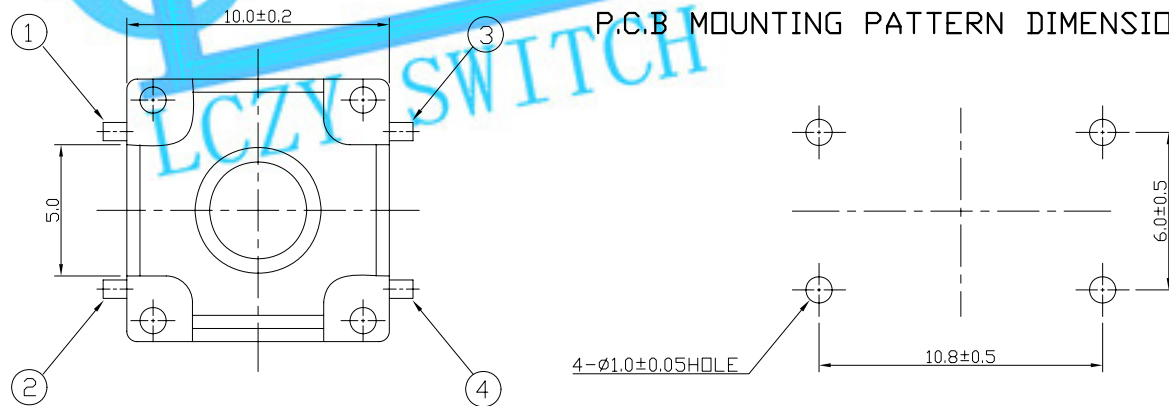

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC12V 50mA	
CONTACT RESISTANCE	500mΩ MAX.	
TRAVEL	0.3 ^{+0.2} _{-0.1} mm	
OPERATING FORCE	160±50gf	250±70gf
OPERATING LIFE(cycles)	100,000	

8	TERMINAL	C2680-EH	1		.X ±0.3	X. ±2°	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	CASE	NYLON66	1				mm				
6	CONTACT	SUS 301	1				MAT'L	TITLE: TACT SWITCH/waterproof PART NO.: AT-1147 SERIES			
5	STEM	NYLON46	1				SEE NOTE				
4	CAPTON TAPE	TAPE	1				FINISH	DR: Ricky 2015/04/30 DWG NO.: AKS-1147			
3	RUBBER	NBR	1				SEE NOTE				
2	COVER	NYLON66	1				Q'TY	CHKD: Ricky 2015/04/30			
1	KNOB	NYLON66	1								
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			APPD:			
								SCALE: 1:1 SHEET: 1/1 REV.: A CUSTOMER DRAWING			