


DIMENSIONS

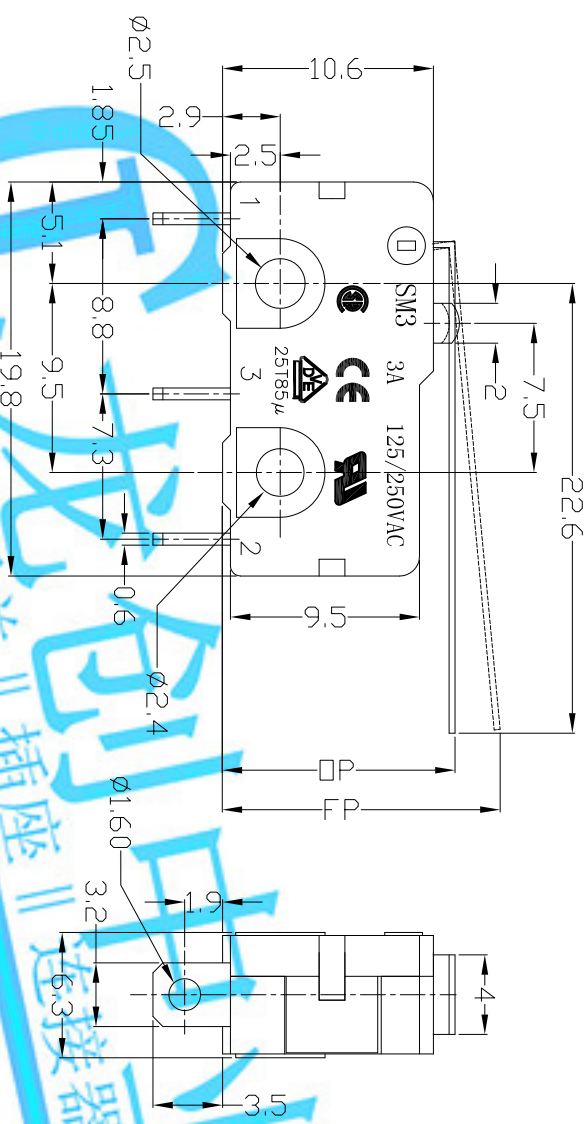

MODEL CODE

SM 3-00 X-XX S-C31

1 2 3 4 5 6 7

- 1.Series : SM
- 2.Current Rating : 3=3A 125/250VAC
- 3.Actuator : 00=Non-lever 01=99=Lever
- 4.Termination : see chart (N/P/C/D)
(2=SPST-NO / 3=SPST-NC)
- 5.Operating Force : see chart
- 6.Spring Material:S=SUS304
- 7.Contact type: C31=3Amps Contact

CIRCUIT DIAGRAM

1.1 Rated Voltage(AC)	125/250VAC
1.2 Rated Current(AC)	3A
1.3 Contact Resistance	≤100mΩ(initial value)
1.4 Operating Force	18±10gf 28±12gf 45±20gf
1.5 Bounce Time	
1.6 Free Position	15.0±1.5mm
1.7 Operating Position	12.4±1.3mm
1.8 Position Travel	
1.9 Return Force	
2.Reliable Rating	
2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	≥100MΩ DC500V
2.4 Withstand Voltage	AC1000V 1 minute
2.5 Soldering Technic	Hand Soldering
2.6 Operating Temper	-25°C ~ +85°C
2.7 Ambient Humidity Used	<85%RH

Tolerance:±0.2	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
	MAT'L	SEE NOTE			
	FINISH	SEE NOTE			
	Q'TY	CHK'D: Ricky 2017/4/11	DWG NO: ATD-03X-XXS-C31	SCALE SHEET 1/2	REV. A
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.		APPD: Ricky 2017/4/11			