




DIMENSIONS

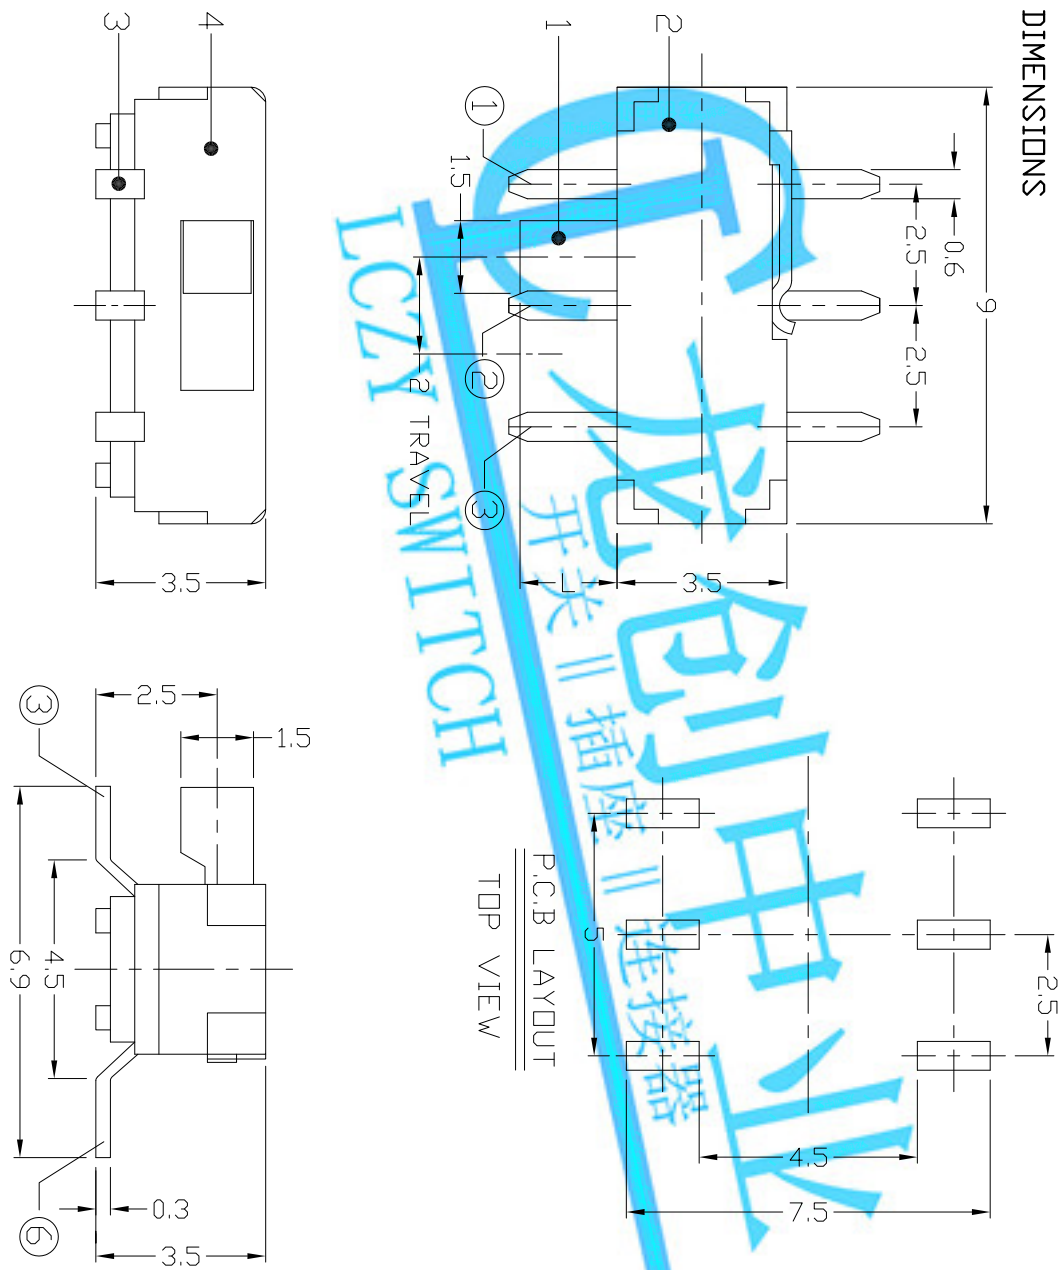

MODEL CODE

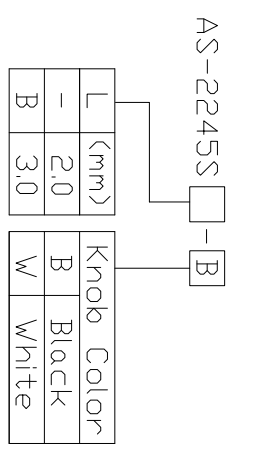

CIRCUIT DIAGRAM



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC6V 0.3A
CIRCUIT	2P2T
TIMING	NON-SHORTING
CONTACT RESISTANCE	100mΩ MAX.
TRAVEL	2mm
OPERATING FORCE	250±150gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm±0.1mm	UNITS	mm
7					OVER 1.5mm±0.2mm	MAT'L	
6						SEE NOTE	
5	CONTACT	PBS	2		Ag CLAD	FINISH	
4	CASE	NYLON+F.G/PA6T	1		BLACK	SEE NOTE	
3	TERMINAL	BRASS STRIP	1		Ag PLATED		
2	COVER	SUS	1		WASHING		
1	KNDB	NYLON+F.G/PA46	1		WHITE/BLACK	Q'TY	
ND.	PARTS	MATERIAL	Q'TY	FINISHING			

LONGCHUANG ZHONGYE (HK)CO.,LIMITED							
TITLE:				PART NO.:			
MINI SLIDE SWITCH / HORIZONTAL				AS-2245S SERIES			
DRI: 2016/12/22				DWG NO.:			
CHKD: 2016/12/22				AZJ-2245S			
APPD: 2016/12/22				SCALE SHEET REV.:			
6/1				1/1 A			
				CUSTOMER DRAWING			