



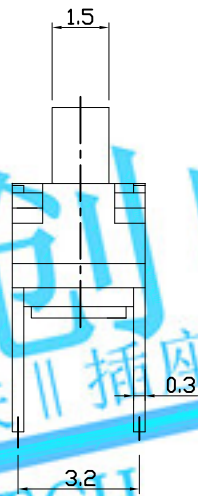


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

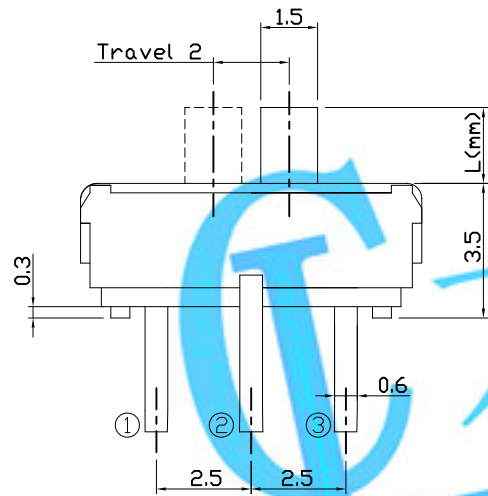

CIRCUIT DIAGRAM



PRODUCT IMAGE



MODEL CODE



AS-1235

L	(mm)
-	2.0
A	4.0
B	3.0

Knob Color	
B	Black
W	White

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

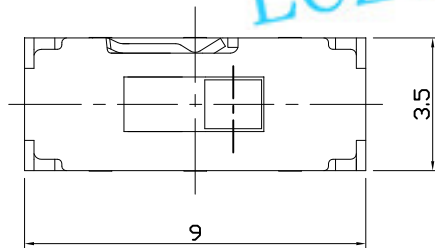

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 6V 0.3A
Circuit	1C-2P
Contact Resistance	70mΩ Max.
Travel	2.0 ± 0.3mm
Operating Force	200±100gf
Operating Life(cycles)	10,000

.X ±0.2

X. ±2°

UNITS

mm


MAT'L

SEE NOTE

FINISH

SEE NOTE

Q'TY



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE:
MINI SLIDE SWITCH

PART NO.:
AS-1235 SERIES

DR: Ricky 2014/04/03

DWG NO.:
ASI-1235

CHKD: Ricky 2014/04/03

APPD:

SCALE	SHEET	REV.	CUSTOMER
1:1	1/1	A	DRAWING