

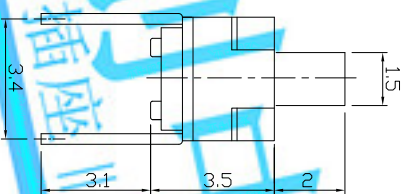


DIMENSIONS

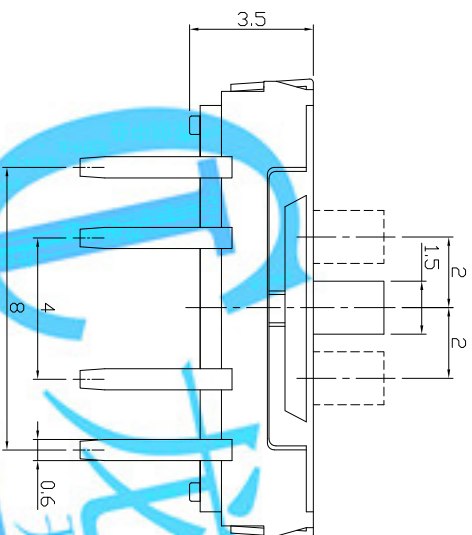

AS-2336  B

Knob Color	
B	Black
W	White

CIRCUIT DIAGRAM


PRODUCT IMAGE

MODEL CODE

REV.	ECN.	NO.	APPD.

P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

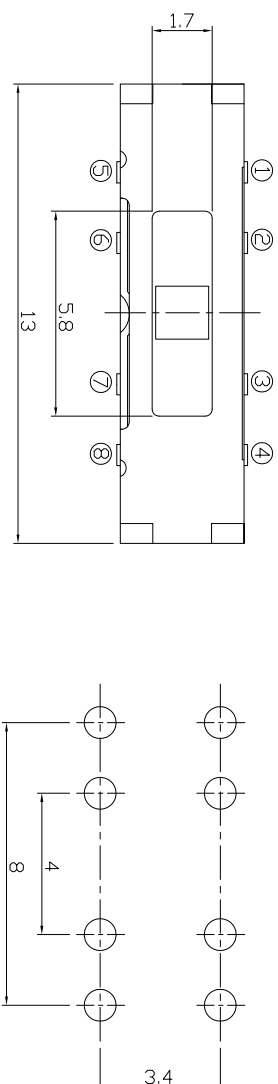

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 6V 0.3A
Circuit	2C-3P
Contact Resistance	70m Ω Max.
Travel	2.0 $\pm$ 0.3mm
Operating Force	250 $\pm$ 100gf
Operating Life(cycles)	10,000

X. ± 0.2		X. $\pm 2^{\circ}$	UNITS	LONGCHUANG ZHONGYE (HK) CO., LIMITED									
			MAT'L	TITLE:		PART NO.:							
			SEE NOTE	MINI SLIDE SWITCH		AS-2336 SERIES							
			FINISH	DR:		DWG NO.:							
			SEE NOTE	DR: <i>Rocky</i> 2014/04/03		AS1-2336							
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR, WRITTEN CONSENT OF ACCURATE INVENTEC INC.			Q'TY	CHKD: <i>Rocky</i> 2014/04/03		SCALE		SHEET	REV.		CUSTOMER		
			APPD:			1:1	1/1	A		DRAWING			