



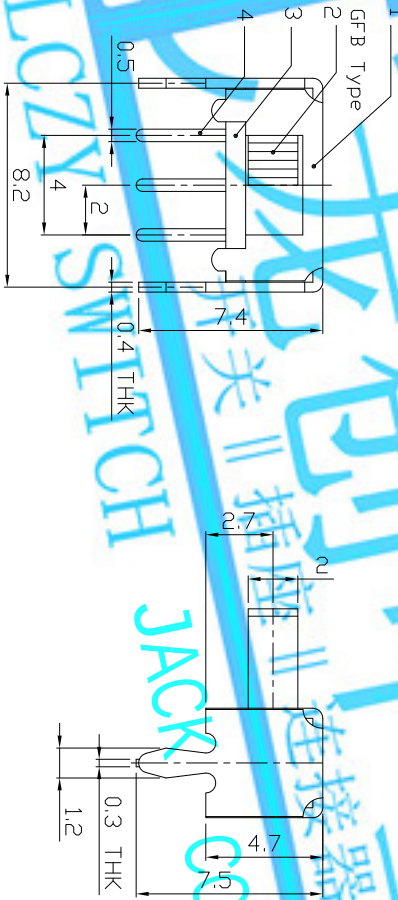



DIMENSIONS

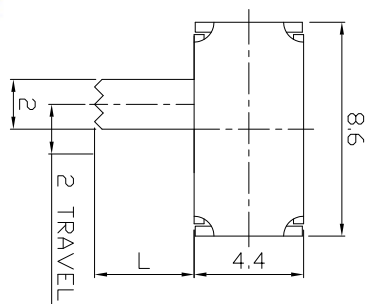

MODEL CODE

SK-12D02-GFB



ELECTRO-MECHANICAL CHARACTERISTICS

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7				OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	SPRING PLATE	SUS	1	AG PLATED		SEE NOTE				
5	CONTACT CLIP	PBS STRIP	1	AG PLATED		FINISH				
4	TERMINAL	BRASS STRIP	3	AG PLATED		SEE NOTE	TITLE:	SLIDE SWITCH / HORIZONTAL	PART NO.:	SK-12D02
3	BASE	PHENOLIC RESIN	1	NATURAL			DR:	Rocky 2016/06/21	DWG NO.:	ADL-12D02
2	KNOB	POM	1	BLACK			CHKD:	Rocky 2016/06/21	SCALE	SHEET 1/1
1	FRAME	STEEL STRIP	1	NI PLATED			Q'TY	APPD:	REV.	CUSTOMER DRAWING
ND.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN CONSENT OF ACCURATE INNOTECH INC.					
			1	4	5	6	7			