






DIMENSIONS



MODEL CODE

SK-12D12-GFB

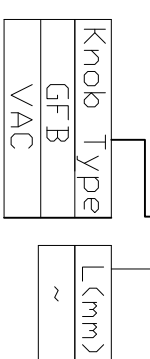

36



VAC

PCB LAYOUT

BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

Refer to additional specifications

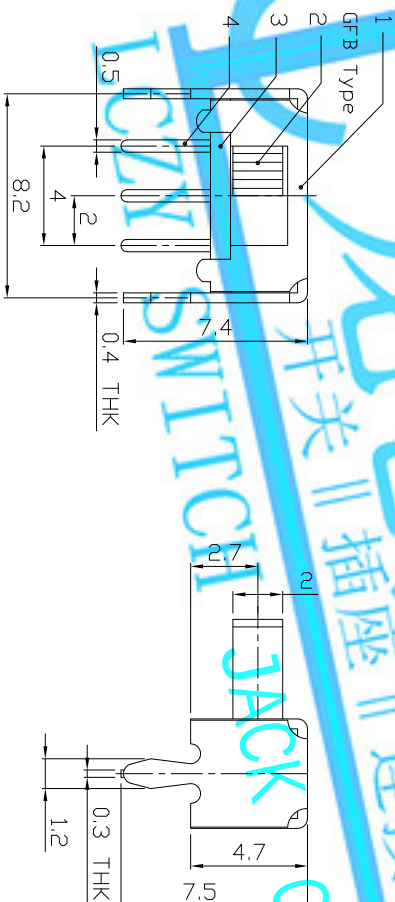

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100m Ω MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250 $\pm$ 100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:			PART NO:		SK-12D12				
SLIDE SWITCH / HORIZONTAL									
SEE NOTE									
OVER 1.5mm: ±0.1mm									
WITHIN 1.5mm: ±0.1mm			UNITS		mm				
MAT'L			FINISH		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.				
SEE NOTE			SEE NOTE						
FINISH			Dwg NO:						
DR: <i>Rocky</i> 2016/06/21			ADL-12D12						
CHK'D: <i>Rocky</i> 2016/06/21			SCALE		SHEET		REV.		
APP'D:			4:1		1/1		A		CUSTOMER DRAWING
Q'TY			Q'TY						
									
ND.			PARTS		MATERIAL		Q'TY		FINISHING
1			FRAME		STEEL STRIP		1		NI PLATED
2			KNOB		PDM		1		BLACK
3			BASE		PHENOLIC RESIN		1		NATURAL
4			TERMINAL		BRASS STRIP		3		AG PLATED
5			CONTACT CLIP		PBS STRIP		1		AG PLATED
6			SPRING PLATE		SUS		1		AG PLATED
7									
8									