





RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

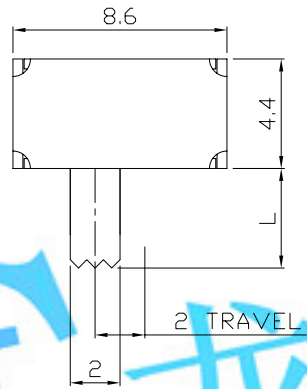


MODEL CODE


SK-12D20-GFB

Knob Type
GFB
VAC



L(mm)
~



P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

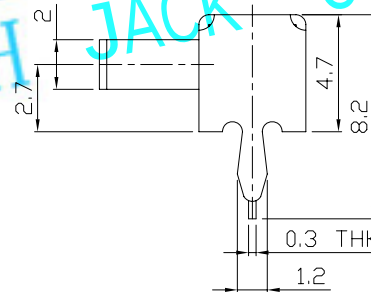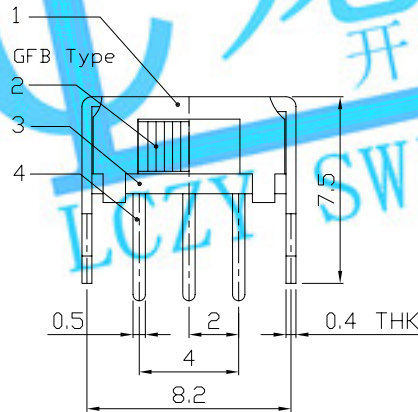

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L				
6	SPRING PLATE	STAINLESS STEEL	1	NATURAL		SEE NOTE	TITLE:	PART NO.:		
5	CONTACT CLIP	PBS C5210R-EH	1	Ag CLAD			SLIDE SWITCH / HORIZONTAL	SK-12D20		
4	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED			DR: Ricky 2015/12/03	DWG NO.:		
3	BASE	PHENOLIC RESIN	1	NATURAL		FINISH	CHKD: Ricky 2015/12/03	ADJ-12D20		
2	KNOB	POM	1	BLACK		SEE NOTE	APPD:	SCALE	SHEET	REV.
1	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY		4:1	1/1	A
NO.	PARTS	MATERIAL	Q'TY	FINISHING						CUSTOMER DRAWING