

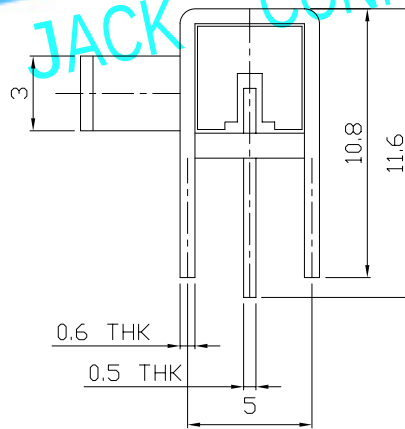


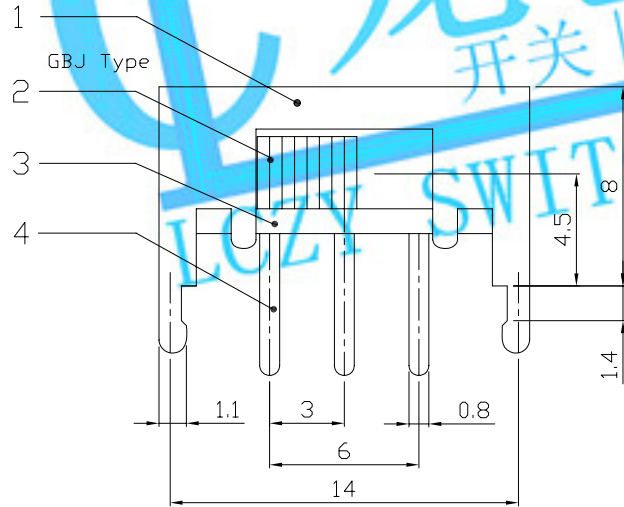

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

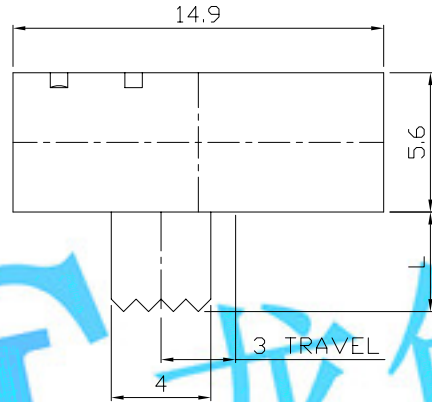

MODEL CODE

SK-12F16- GBJ

Knob Type	L(mm)
GBJ	~

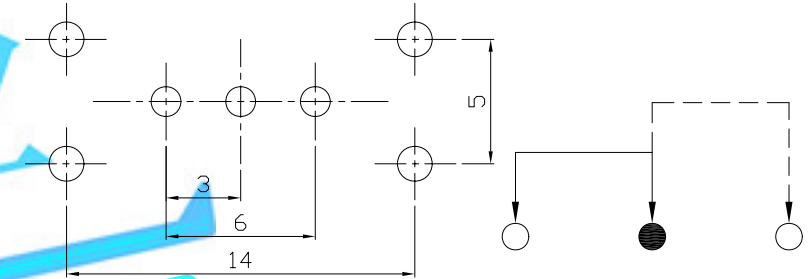

PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	200±100gf
OPERATING LIFE(cycles)	10,000

8					
7	STEEL BALL	STEEL	1	NATURAL	
6	SPRING	STEEL WIRE	1	TEMPER	
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED	
4	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	KNOB	POM	1	BLACK	
1	FRAME	STEEL STRIP	1	Ni PLATED	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm	
OVER 1.5mm: ±0.2mm	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
TITLE:			PART NO.:		
SLIDE SWITCH / HORIZONTAL			SK-12F16		
DR: Ricky 2015/12/04			DWG NO.:		
CHKD: Ricky 2015/12/04			ADJ-12F16		
APPD:			SCALE	SHEET	REV.
			3:1	1/1	A
			CUSTOMER DRAWING		