


MODEL CODE

Knob Type	L (mm)
GEE	~
GFB	
VAC	

REV.	ECN.	ND.	APPD.

MODEL CODE

Knob Type	L (mm)
GEE	~
GFB	
VAC	




CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

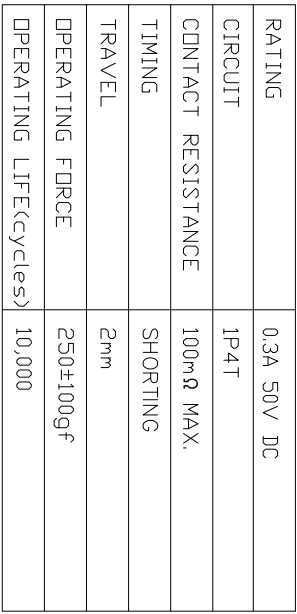

LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
		TITLE:	PART NO:		
		SLIDE SWITCH / HORIZONTAL	SK-14D01		
		DR: Jocky 2016/06/23	DWG NO: ADL-14D01		
		CHKD: Jocky 2016/06/23			
		APPD:	SCALE SHEET REV.	CUSTOMER DRAWING	
			4:1 1/1 A		
UNITS mm					
WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm		MAT'L			
		SEE NOTE			
		FINISH			
		SEE NOTE			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY			
8					
7					
6	SPRING PLATE	PBS STRIP	1	NATURAL	
5	CONTACT CLIP	PBS STRIP	1	A9 CLAD	
4	TERMINAL	BRASS STRIP	6	A9 CLAD	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	KNOB	POM	1	BLACK	
1	FRAME	STEEL STRIP	1	N1 PLATED	
ND.	PARTS MATERIAL	Q'TTY FINISHING			