

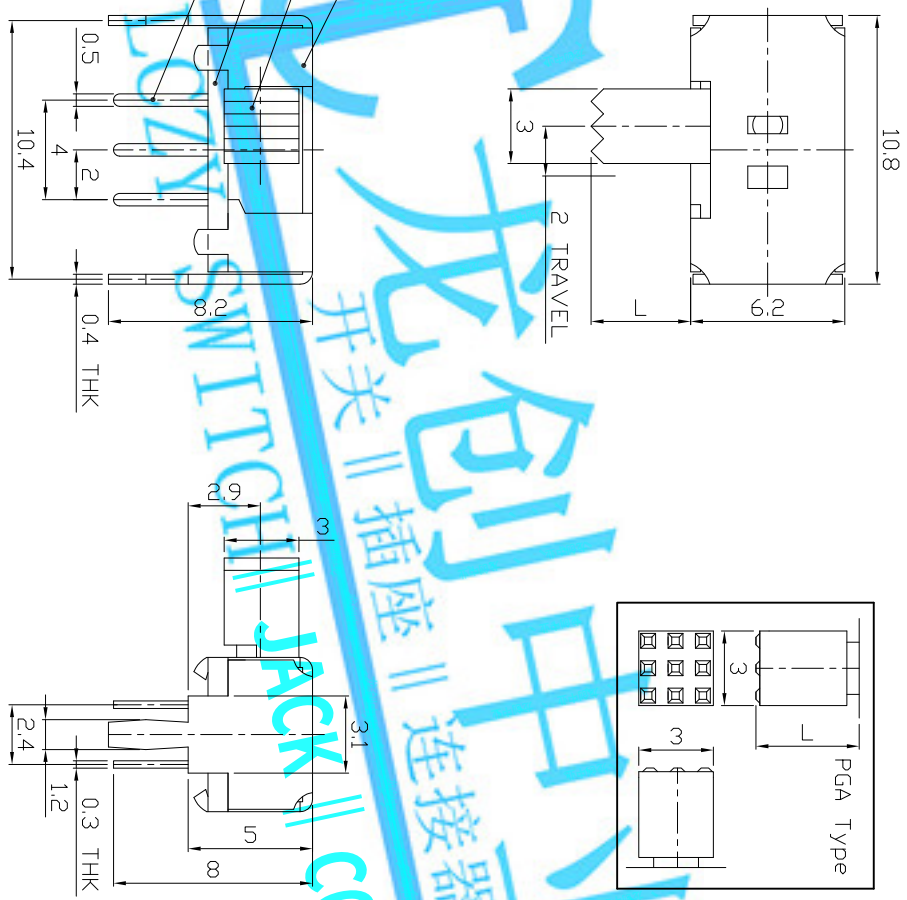



DIMENSIONS



MODEL CODE

SK-22D06-GEI



P.C.B. LAYOUT

CIRCUIT DIAGRAM

BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7					OVER 1.5mm: ±0.2mm	MAT'L						
6	CONTACT CLIP	PBS STRIP	2	NATURAL		SEE NOTE						
5	SPRING PLATE	SUS	1	NATURAL		FINISH						
4	TERMINAL	BRASS STRIP	6	Ag PLATED		SEE NOTE						
3	BASE	PHENOLIC RESIN	1	NATURAL		DR:	Sticky	2016/06/24	DWG NO:	ADL-22D06		
2	KNOB	POM	1	BLACK		CHKD:	Sticky	2016/06/24	SCALE	SHEET	REV.	
1	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY			4:1	1/1	A	CUSTOMER DRAWING
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:						