








RoHS
Compliant
2002/95/EC

MODEL CODE

SK-22D13-GBG


REV.	ECN.	NO.	APPD.

DIMENSIONS

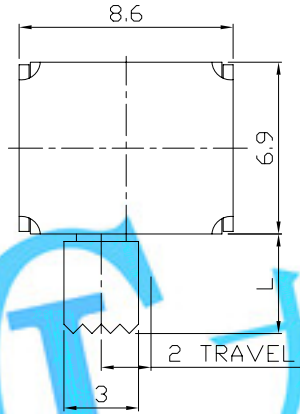


Knob Type
GBG
VAA
PGA
GFB
VAC



L(mm)
~



PCB LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

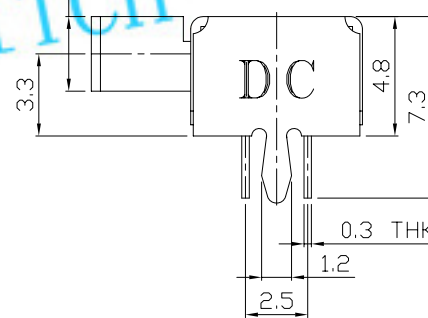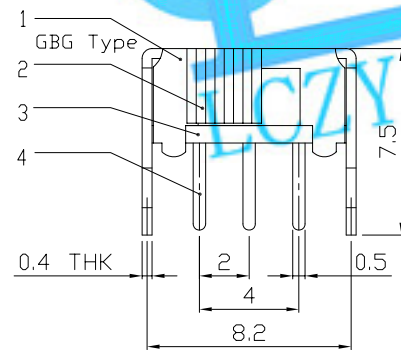

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 30V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L				
6	SPRING PLATE	SUS	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / HORIZONTAL		PART NO.: SK-22D13	
5	CONTACT CLIP	PBS C5210R-EH	2	Ag CLAD			DR: Ricky 2015/12/15		DWG NO.: ADJ-22D13	
4	TERMINAL	BRASS STRIP	6	Ag PLATED OVER Ni PLATED			CHKD: Ricky 2015/12/15			
3	BASE	PHENOLIC RESIN	1	NATURAL			APPD:		SCALE	SHEET
2	KNOB	POM/NYLON+F.G+94V0	1	BLACK					4:1	1/1
1	FRAME	STEEL STRIP	1	Ni PLATED					REV.	A
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				CUSTOMER DRAWING	