

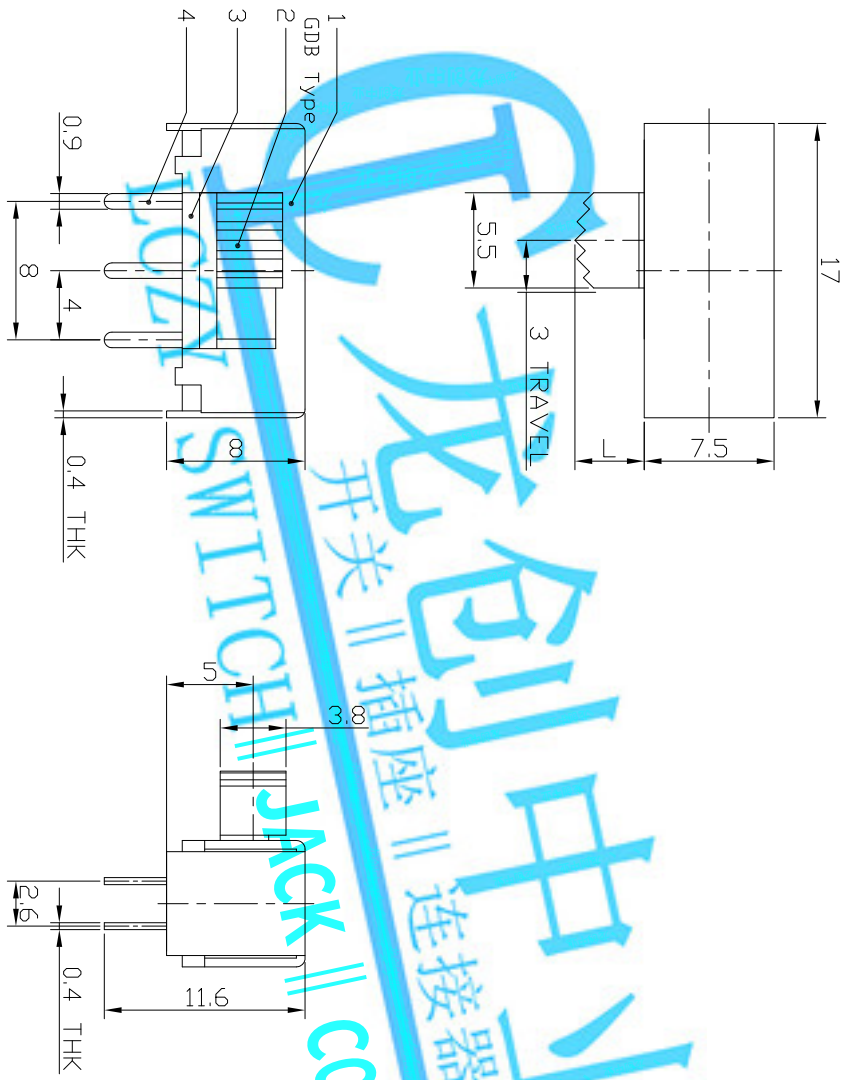



DIMENSIONS



MODEL CODE

SK-22F01-GDB



P.C.B. LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3mm
OPERATING FORCE	200±80gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	2	NATURAL	MAT'L SEE NOTE	TITLE: SLIDE SWITCH / HORIZONTAL PART NO.: SK-22F01 DWG NO.: ADL-22F01			
6	CONTACT	BRASS STRIP	2	AG PLATED	FINISH SEE NOTE				
5	TERMINAL	BRASS STRIP	6	AG PLATED	DR: 2016/06/24				
4	BASE	PHENOLIC RESIN	1	NATURAL	CHKD: 2016/06/24				
3	KNDB	POM	1	BLACK	Q'TY	SCALE	SHEET	REV.	CUSTOMER
2	FRAME	STEEL STRIP	1	NI PLATED	APPD:	21	1/1	A	DRAWING
1	PARTS	MATERIAL	Q'TY	FINISHING					