

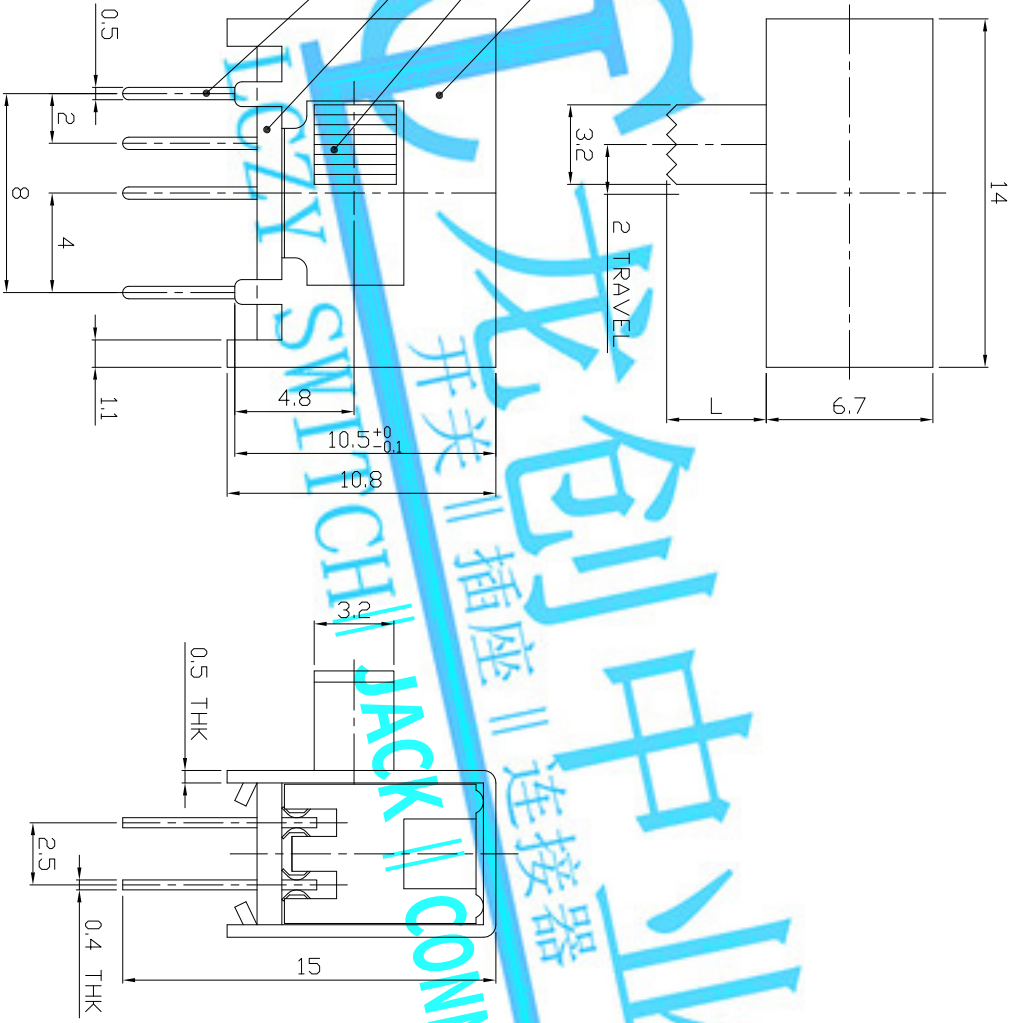


DIMENSIONS

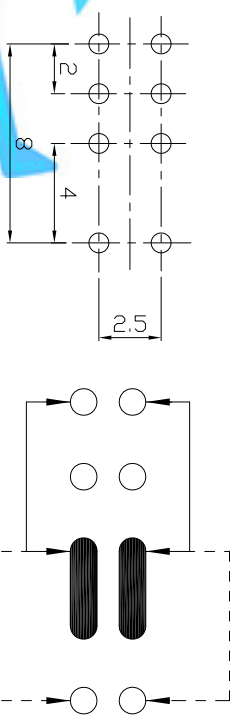

MODEL CODE

SK-22H01-GFN

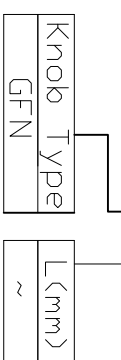

PCB PAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	SPRING	STEEL WIRE	1	NATURAL		MAT'L				
6	CONTACT CLIP	PBS STRIP	2	AG PLATED		SEE NOTE				
5	TERMINAL	BRASS STRIP	8	AG PLATED		FINISH				
4	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE				
3	KNOB	POM	1	BLACK		DR: Ricky 2016/06/27	DWG NO: ADL-22H01			
2	FRAME	STEEL STRIP	1	NI PLATED		CHKD: Ricky 2016/06/27	SCALE 3/1	SHEET 1/1	REV. A	CUSTOMER DRAWING
1	PARTS	MATERIAL	Q'TY	FINISHING		APPD:				