Pb Process Capable

RoHS Compliant 2002/95/EC

REV.	ECN. NO.	APPD.

MODEL CODE

SK-23D25-GBP

Knob Type	L(mm)
GBP	~

DIMENSIONS

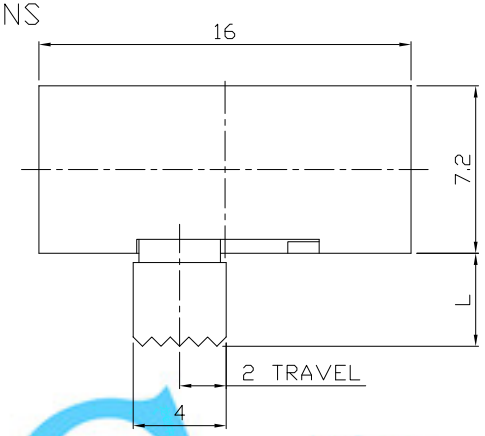

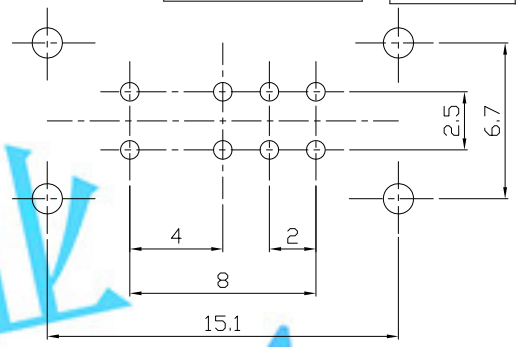

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

GBP Type

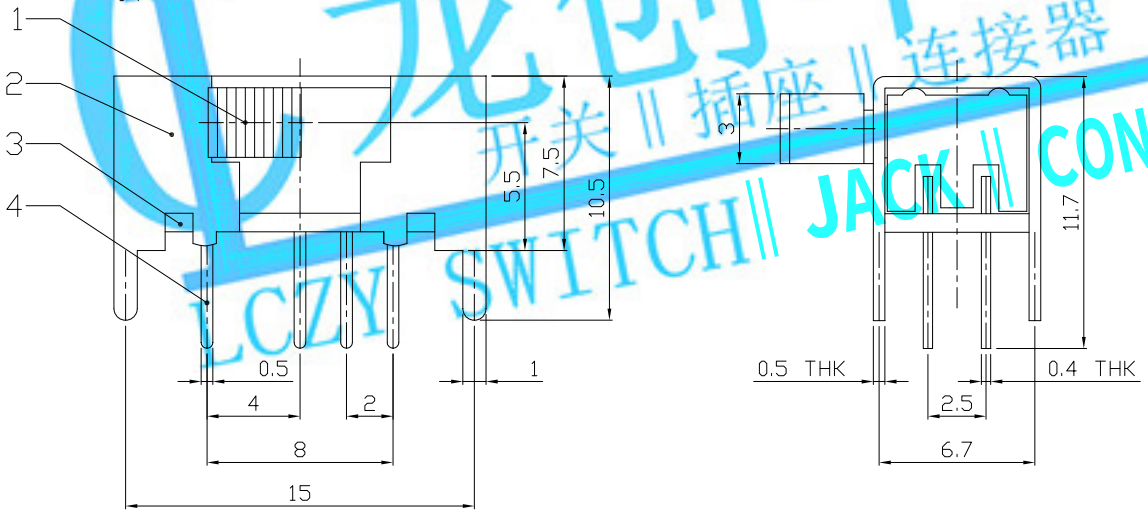

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7	CONTACT CLIP	PBS STRIP	2	Ag PLATED
6	SPRING	STEEL WIRE	1	NATURAL
5	STEEL BALL	STEEL	1	NATURAL
4	TERMINAL	BRASS STRIP	8	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	POM	1	BLACK

WITHIN 1.5mm: ±0.1mm
OVER 1.5mm: ±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm
MAT'L SEE NOTE
FINISH SEE NOTE
Q'TY

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TITLE: SLIDE SWITCH / HORIZONTAL
PART NO.: SK-23D25
DR: Ricky 2016/07/11
DWG NO.: ADL-23D25
CHKD: Ricky 2016/07/11
APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
3:1	1/1	A	

龙创中业 开关 || 插座 || 连接器 LCZY SWITCH || JACK || CONNECTOR