
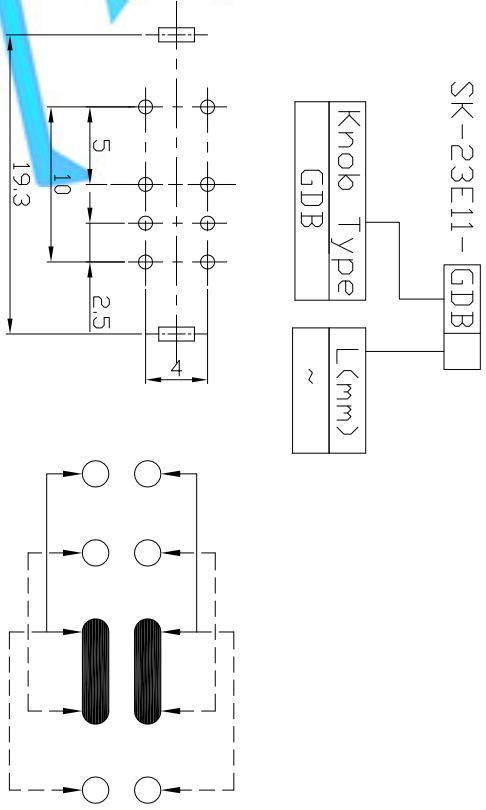


DIMENSIONS

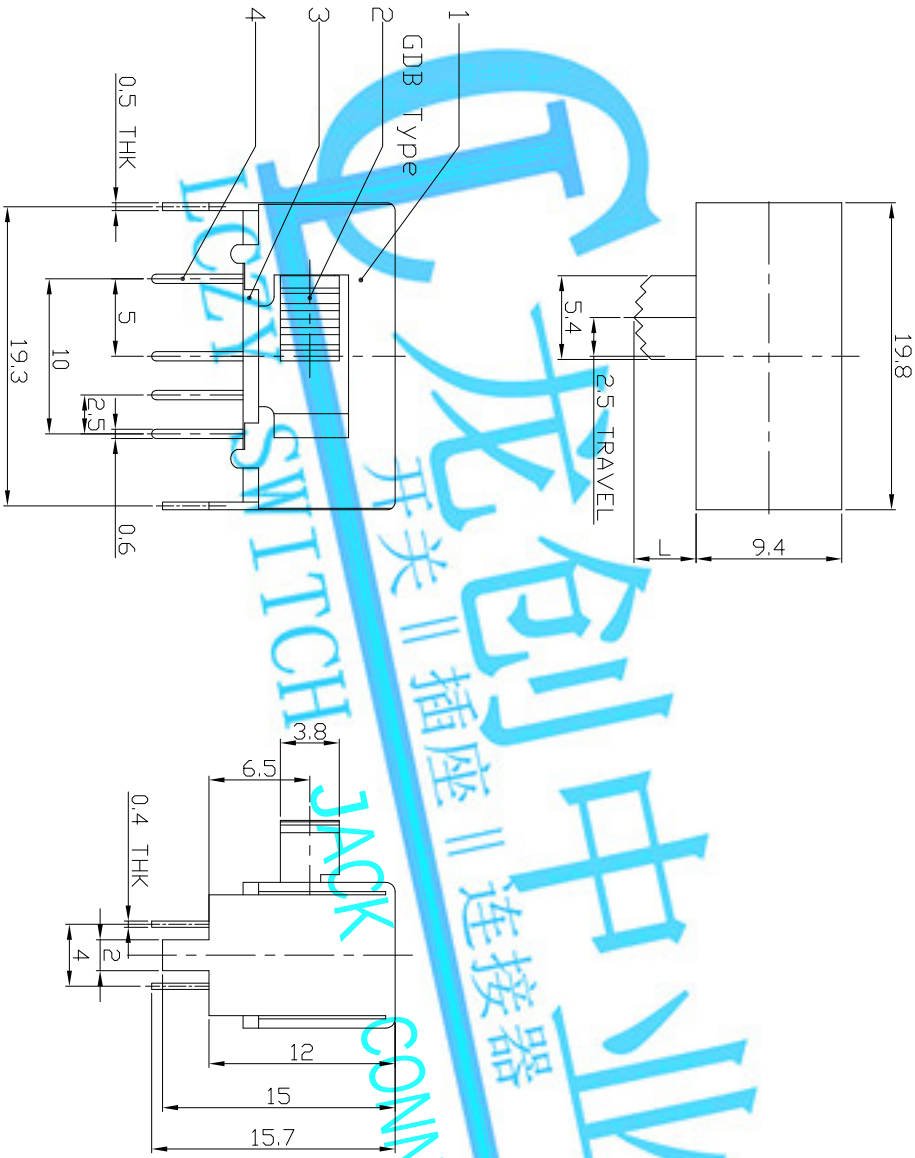

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications	
RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2.5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7	STEEL WIRE	STEEL	1	NATURAL	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE				
6	CONTACT CLIP	PBS STRIP	2	AG PLATED		FINISH	SEE NOTE				
5	CONTACT CLIP	PBS STRIP	2	AG PLATED		FINISH	SEE NOTE				
4	TERMINAL	BRASS STRIP	8	AG PLATED		FINISH	SEE NOTE				
3	BASE	PHENOLIC RESIN	1	NATURAL		DR:	2016/07/13	PART NO.:	SK-23E11	DWG NO.:	ADL-23E11
2	KNOB	POM	1	BLACK		CHKD:	2016/07/13	SCALE	1/1	REV.	A
1	FRAME	STEEL STRIP	1	NI PLATED		Q'TY	21	CUSTOMER	DRAWING		
ND.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:					