
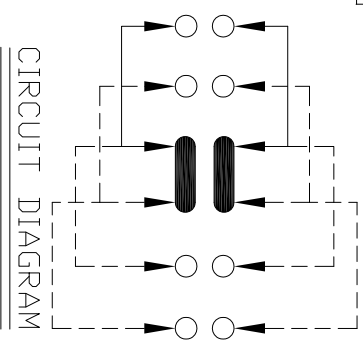
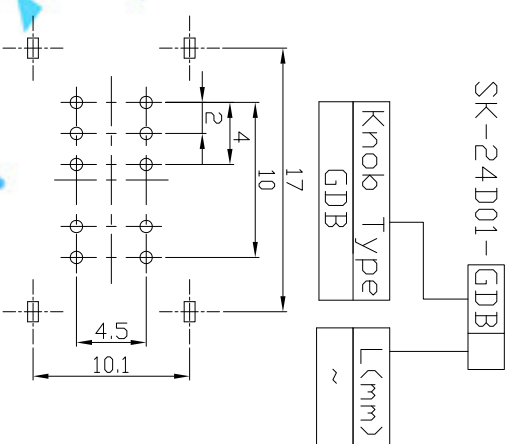
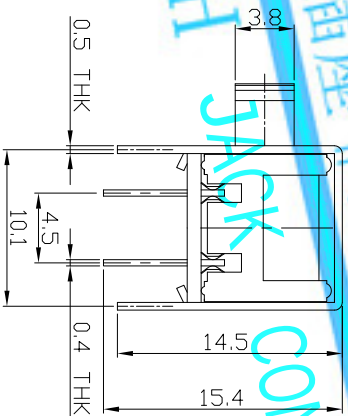
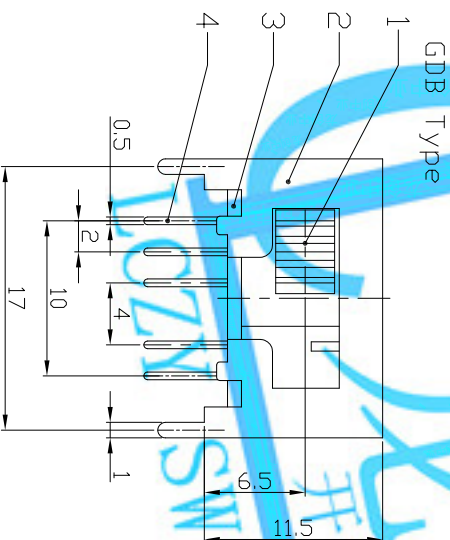


DIMENSIONS

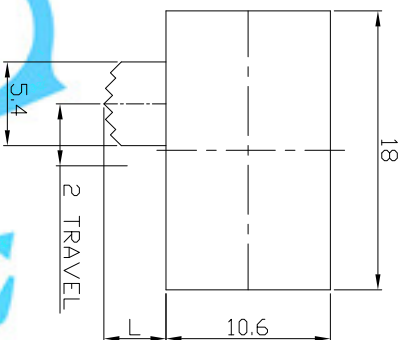

P.C.B LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:		PART NO:		SK-24D01					
SLIDE SWITCH / HORIZONTAL									
DR: Rocky 2016/07/14		DWG NO:		ADL-24D01					
CHKD: Rocky 2016/07/14									
APPD:		SCALE		SHEET		REV.		CUSTOMER DRAWING	
		2:1		1/1		A			
UNIT: mm MAT'L SEE NOTE WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm FINISH SEE NOTE Q'TY SEE NOTE									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LONGCHUANG ZHONGYE (HK) CO., LIMITED AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE WRITTEN CONSENT OF LONGCHUANG ZHONGYE (HK) CO., LIMITED									
8									
7	STEEL BALL	STEEL	1	NATURAL					
6	SPRING	STEEL WIRE	1	NATURAL					
5	CONTACT CLIP	PBS STRIP	2	AG PLATED					
4	TERMINAL	BRASS STRIP	10	AG PLATED					
3	BASE	PHENOLIC RESIN	1	NATURAL					
2	FRAME	STEEL STRIP	1	NI PLATED					
1	KNOB	POM	1	BLACK					
ND.	PARTS	MATERIAL	Q'TY	FINISHING					