

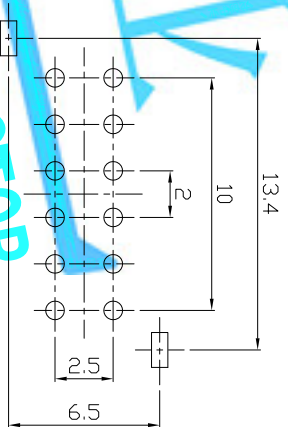
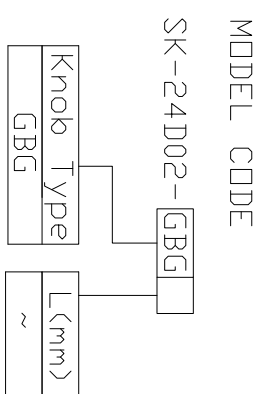
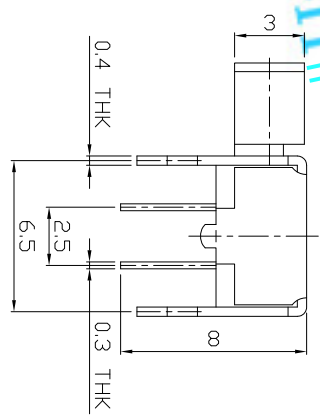


DIMENSIONS

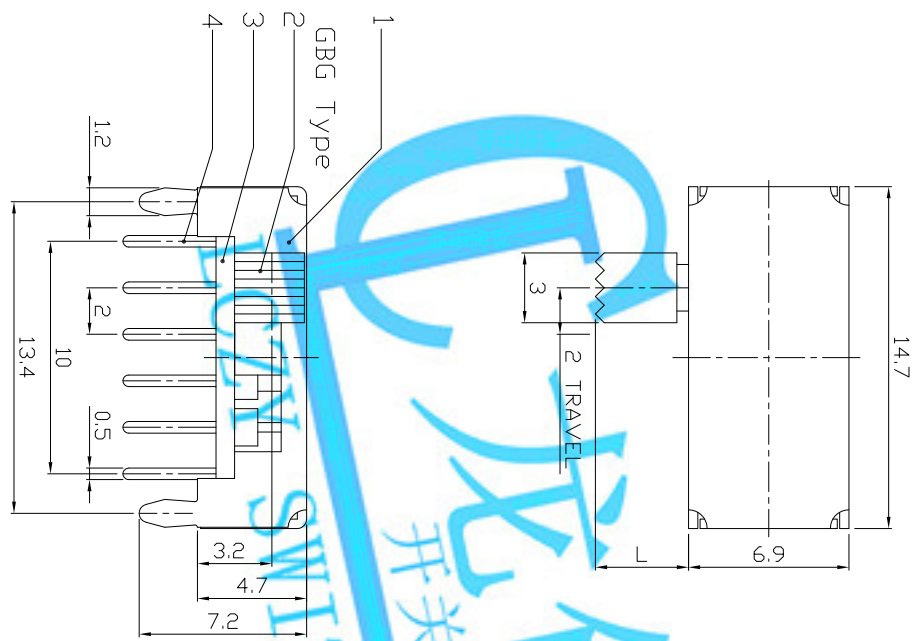

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	300±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
7					OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE	TITLE: SLIDE SWITCH / HORIZONTAL
6	SPRING PLATE	PBS STRIP	1	NATURAL		SEE NOTE		PART NO.: SK-24D02
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED		FINISH		
4	TERMINAL	BRASS STRIP	12	Ag PLATED		SEE NOTE		
3	BASE	PHENOLIC RESIN	1	NATURAL		DR: 2016/07/13	DWG NO: ADL-24D02	
2	KNOB	POM	1	BLACK		CHKD: 2016/07/13	SCALE 1/1	REV. A
1	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY	34	CUSTOMER DRAWING
NO.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:		