
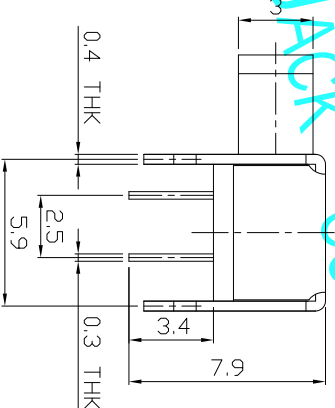
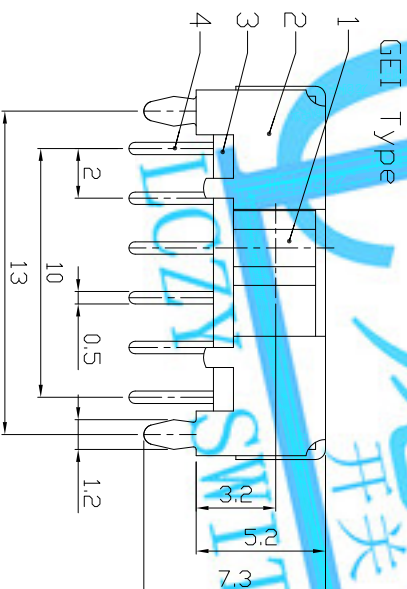
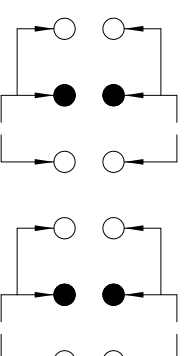
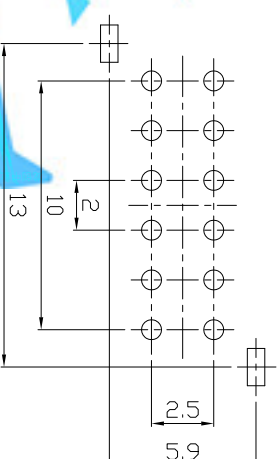



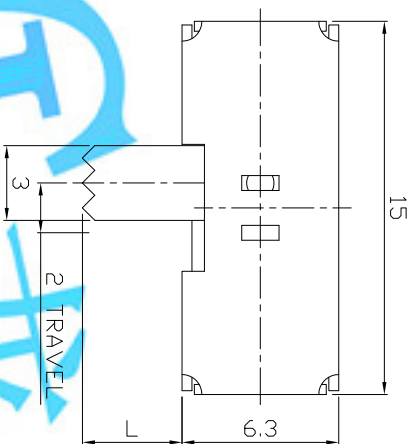

RATING	0.3A 50V DC
CIRCUIT	4P2T
CONTACT RESISTANCE	100m Ω MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	300 $\pm$ 100gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
		UNITS		PART NO.:					
		mm							
8				WITHIN 1.5mm: ±0.1mm		TITLE:		SK-42D01	
7				OVER 1.5mm: ±0.2mm		SLIDE SWITCH / HORIZONTAL			
6	SPRING PLATE	SUS	1	NATURAL	MAT'L	SEE NOTE		DWG NO.:	
5	CONTACT CLIP	PBS STRIP	4	AG PLATED				ADL-42D01	
4	TERMINAL	BRASS STRIP	12	AG PLATED					
3	BASE	PHENOLIC RESIN	1	NATURAL	FINISH	SEE NOTE			
2	FRAME	STEEL STRIP	1	NI PLATED	Q'TY	CHK'D: <i>Rocky</i> 2016/07/19			
1	KNOB	POM	1	BLACK		APD: <i>Rocky</i> 2016/07/19		SCALE SHEET REV. 3:1 1/1 A	
NO.	PARTS	MATERIAL	Q'TY	FINISHING			CUSTOMER DRAWING		