

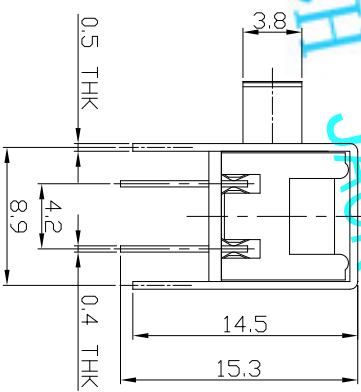



DIMENSIONS

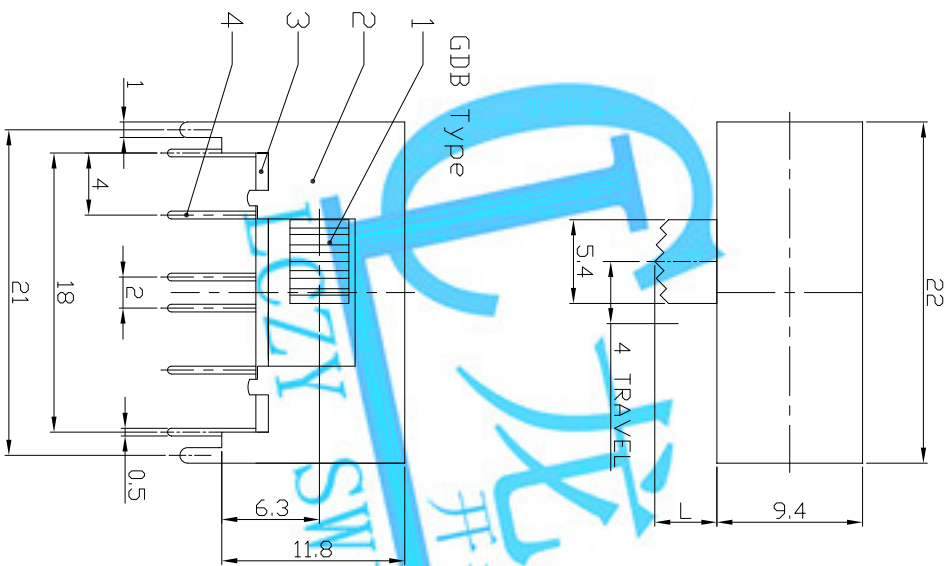

P.C.B LAYOUT
BOTTOM VIEW

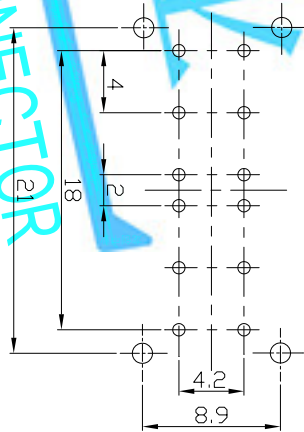

CIRCUIT DIAGRAM

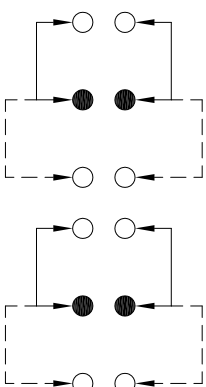

MODEL CODE

SK-42H13-GDB



ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	4mm
OPERATING FORCE	200±80gf
OPERATING LIFE(cycles)	10,000

8	STEEL BALL	STEEL	1	NATURAL	WITHIN 1.5mm: ±0.1mm	UNITS	mm	<p>LONGCHUANG ZHONGYE (HK)CO.,LIMITED</p> <p>TITLE: SLIDE SWITCH / HORIZONTAL</p> <p>PART NO.: SK-42H13</p> <p>DWG NO.: ADL-42H13</p> <p>SCALE: 1/1</p>		
7	SPRING	STEEL WIRE	1	TEMPER	OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE			
6	CONTACT CLIP	PBS STRIP	4	AG PLATED		FINISH	SEE NOTE			
5	TERMINAL	BRASS STRIP	12	AG PLATED		DR:	2016/07/14			
4	BASE	PHENOLIC RESIN	1	NATURAL		CHK'D:	2016/07/14			
3	FRAME	STEEL STRIP	1	NI PLATED		APP'D:				
2	KNDB	POM	1	BLACK		SCALE	1/1			
1	PARTS	MATERIAL	Q'TY	FINISHING		SHEET	1/1			
					<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN CONSENT OF ACCURATE INNOTECH INC.</p>			REV.	ECN. NO.	APPL.