



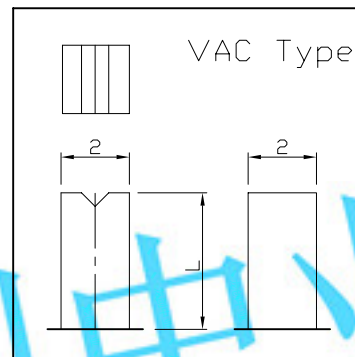






RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

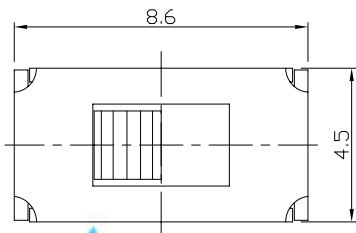

MODEL CODE

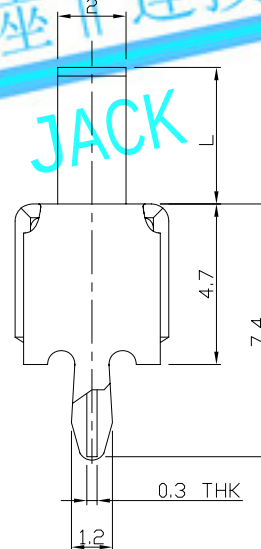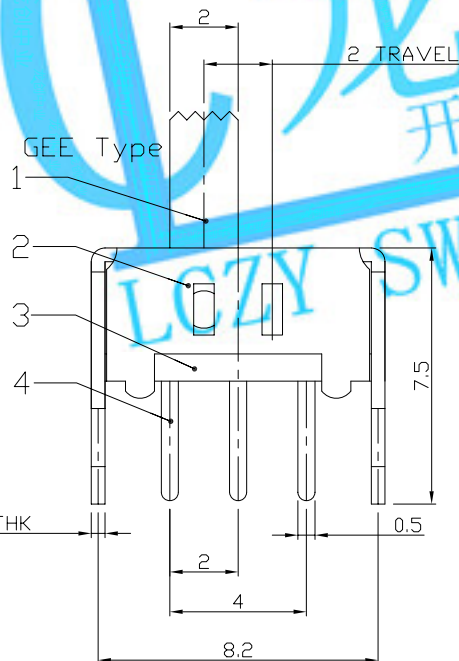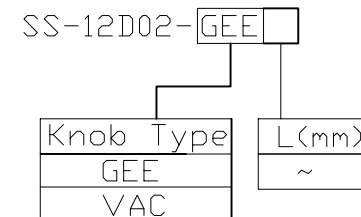

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED								
7					OVER 1.5mm: ±0.2mm	MAT'L									
6	SPRING PLATE	PBS STRIP	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12D02						
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED											
4	TERMINAL	BRASS STRIP	3	Ag PLATED		FINISH	DR: Ricky 2015/05/19		DWG NO.: ADL-12D02						
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE									
2	FRAME	STEEL STRIP	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY	CHKD: Ricky 2015/05/19		SCALE SHEET REV. CUSTOMER 4:1 1/1 A DRAWING						
1	KNOB	POM	1	BLACK			APPD:								
NO.	PARTS	MATERIAL	Q'TY	FINISHING											
1		2		3		4		5		6		7			