



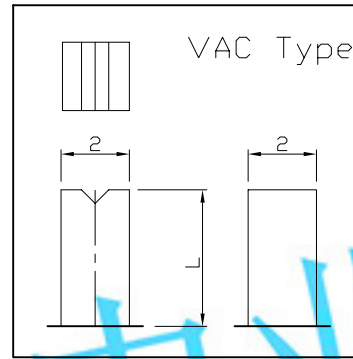



RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.


DIMENSIONS

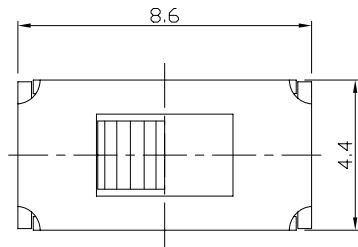



MODEL CODE

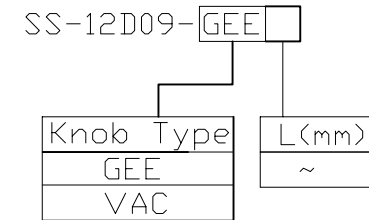

PCB LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

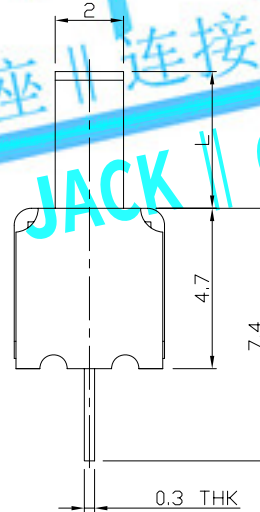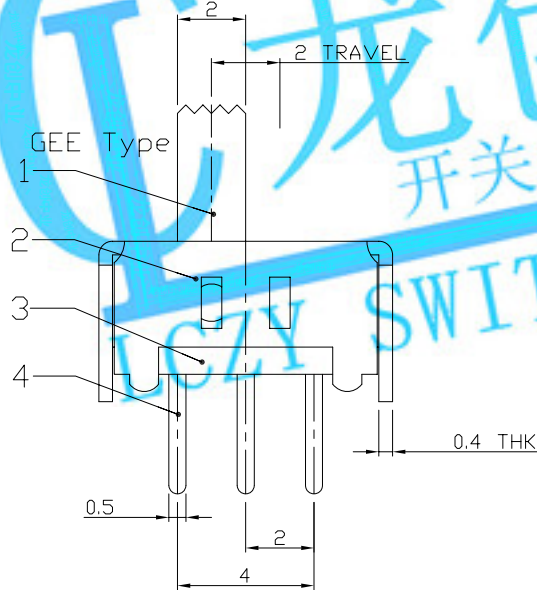

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	DC50V 0.3A
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED						
7					OVER 1.5mm: ±0.2mm	MAT'L							
6	SPRING PLATE	SUS	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12D09				
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED			FINISH SEE NOTE	DR: <i>Ricky</i> 2015/05/20	DWG NO.: ADL-12D09				
4	TERMINAL	BRASS STRIP	3	Ag PLATED				CHKD: <i>Ricky</i> 2015/05/20					
3	BASE	PHENOLIC RESIN	1	NATURAL			Q'TY 	APPD:	SCALE 4:1	SHEET 1/1	REV. A	CUSTOMER DRAWING	
2	FRAME	STEEL STRIP	1	Ni PLATEFD									
1	KNOB	POM	1	BLACK									
NO.	PARTS	MATERIAL	Q'TY	FINISHING									
1		2		3		4		5		6		7	