





DIMENSIONS





MODEL CODE

SS-12D13-



GEE	
-----	--

Knob Type	L(mm)
GEE	~
VAC	



P.C.B LAYOUT
BOTTOM VIEW


CIRCUIT DIAGRAM

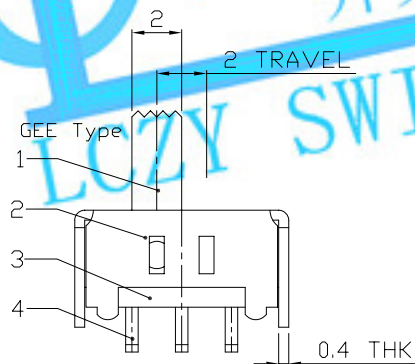

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING PLATE	PBS STRIP	1	NATURAL		SEE NOTE	TITLE:	PART NO.:			
5	CONTACT CLIP	PBS STRIP	1	Ag CLAD			SLIDE SWITCH / VERTICAL	SS-12D13			
4	TERMINAL	BRASS STRIP	3	Ag CLAD		FINISH	DR:	2015/07/07		DWG NO.:	
3	BASE	PHENOLIC RESIN	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE, INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	CHKD:	2015/07/07		ADL-12D13	
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY					
1	KNOB	POM	1	BLACK							
NO.	PARTS	MATERIAL	Q'TY	FINISHING				APPD:	4:1	1/1	A