

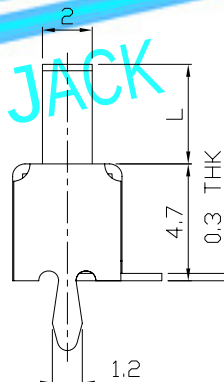
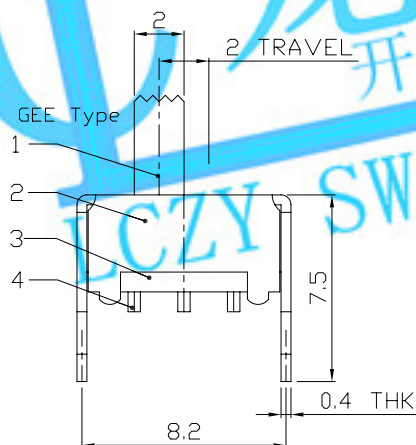




DIMENSIONS





MODEL CODE

SS-12D25-

GEE	
-----	--

Knob Type
GEE
VAC

L (mm)
~



PCB LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED				
7					OVER 1.5mm: ±0.2mm	MAT'L	TITLE:		PART NO.:		
6	SPRING PLATE	STAINLESS STEEL	1	NATURAL		SEE NOTE	SLIDE SWITCH / VERTICAL		SS-12D25		
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED			DR:	Ricky 2015/06/09	DWG NO.:		
4	TERMINAL	BRASS STRIP	3	Ag PLATED OVER Ni PLATED		FINISH	CHKD:	Ricky 2015/06/09	ADJ-12D25		
3	BASE	PHENOLIC RESIN	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE					
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY					
1	KNOB	POM	1	BLACK							
NO.	PARTS	MATERIAL	Q'TY	FINISHING			APPD:	4:1	1/1	A	CUSTOMER DRAWING